

NEW!



Patio roof

Terrazza Pure

06

Terrazza Pure is the perfect weather protection solution to bring as much light as possible to patios in Northern and Central European regions with less sun and more rain – and all in an elegant cubic design. The new cubic glass patio roof design is something really special: as the combination of its cubic shape and glass-covered roof is only offered by a few manufacturers on the market in a quality that doesn't come close to weinor's.



New rectangular shape for modern architecture provides head clearance heights with low wall bracket too



Side roof supports:

Can be individually fitted with decorative strips



Innovative roof support design thanks to:

- Decorative strips in trend colours or the frame colour
- High-quality colour LED strip
- LED strips and decorative strips can be freely combined

Decorative strips in 5 trend colours



Attractive post design thanks to:

- Decorative strips in trend colours or the frame colour
- High-quality 400 colour LED strip below
- High-quality 1,600 colour LED strip above



Terrazza Pure Highlights

Innovative glass support system:


Flush, proven to be stable,
secure and watertight

Reliable drainage with linear
look at the same time



No angles:

Ideal for optional conversion
with glazing elements



New cabling concept:

Integrated electronics and
easy to reach cable paths



SUPER LITE side glazing:

Can be integrated extremely
easily into roof supports

06

Terrazza Pure Benefits




Modern design in a class of its own

Terrazza Pure is one of the highest quality cubic patio roofs on the market with straight roof supports and fixed, supported glass supports for an integrated glass slope. The rectangular design harmonises perfectly with linear architecture, however old the building is.



Innovative glass support system

weinor developed the unique glass support system especially for Terrazza Pure. The supported glass support system forms a slope inside the straight roof support. This ensures the reliable drainage of water over the emergency drainage gutter and at the same time provides the cubic look.

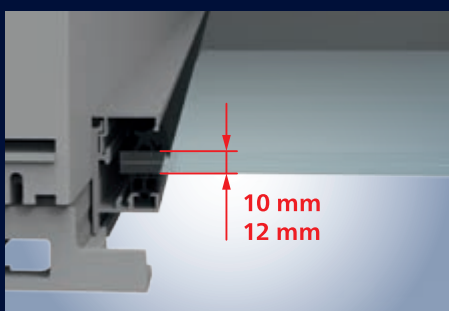

Stable glass – resilient, shatter-proof and flooded with daylight

Terrazza Pure is designed for high-quality laminated safety glass (LSG):

- Roofing from 10 or 12 mm LSG
- Highly resilient, structurally tested
- Accessible to personnel for maintenance work from a thickness of 10 mm



High-quality colour LED strips

A new lighting concept allows for the fitting of posts and roof supports with colour LED strips:

- 400 mm long in lower post area
- 1,600 mm long in upper post area
- On the underside of the roof support
- Integrated cabling ready to plug in



Elegant decorative strips

5 different anodised aluminium decorative strips (silver aluminium, copper aluminium, brown aluminium, brass aluminium and anthracite aluminium) can be integrated into posts and roof supports:

- Across the entire length of the posts' outsides
- On the underside of the centre roof support
- Sideways on the outer roof supports

Terrazza Pure Benefits – expandable system



Modular system – really easy to expand

Terrazza Pure can be expanded by vertical glass elements to create the Glasoase®. The components are:

- The w17 easy full glass sliding door
- Fixed glazing without frames, SUPER LITE side element
- The dimensions and shape of the guttering and the posts have been designed in such a way that glazing elements (GE) can be mounted without additional profiles
- Clever cabling concepts tailored to the products



Sun protection – glare, privacy and heat protection

weinor offers conservatory and vertical awnings to complement Terrazza Pure. They prevent patios and indoor rooms from heating up and protect against unpleasant glare and furniture and carpets fading. Vertical sun protection provides privacy protection on the sides. They are ideally tailored to Terrazza Pure and can also be retrofitted later on.




High-performance Tempura Quadra heating system

Tempura, the energy-efficient infrared heating system convinces with heat output of 1,500 watt in a tiny housing.


- Instant heat: no warm-up time
- Turn as required for targeted warmth
- Operate and dim using BiConnect radio control
- Splash protection
- Comes in 47 standard frame colours plus 9 trend colours in trend colours with a smart, textured look
- Optional: 150 special RAL colours
- Universal bracket makes it easy to retrofit
- TÜV tested

06




Under roof awning

The Sottezza II under roof conservatory awning protects against dazzle and UV rays. Perfectly matched to the Terrazza Pure, it is ideally suited for well-ventilated rooms.



The over roof conservatory awning

A roof-mounted conservatory awning from the WGM range is the ideal solution for side elements that are closed for the most part. It protects against overheating.

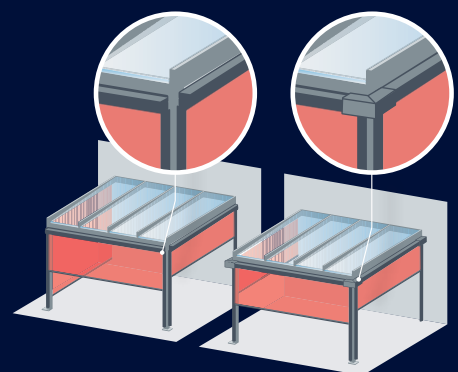

Side awning


The weinor vertical sun protection systems VertiTex II offer reliable privacy, glare and sun protection. With Terrazza Pure VertiPlus, the combination of the square VertiTex II 112 with beautiful faceplates creates the perfect package.

Terrazza Pure Technology

Technology overview

Terrazza Pure

Type A pent roof with integrated rain gutter



Technology

Max. roof width	7,000 mm, single section roof, symmetrical roof panels
Min. – max. roof depth	1,600 mm – 4,000 mm
Glass slope (up to 2,599 mm roof depth)	3.2°
Glass slope (up to 4,000 mm roof depth)	2.1°
Guttering drainage	<input type="radio"/> covered
Snow load 750 N/m ²	<input checked="" type="radio"/>
Snow loads up to 5,500 N/m ²	<input type="radio"/>

Options

Colour LED strips in roof supports	<input type="radio"/>
Colour LED strips in 400/1,600 mm posts	<input type="radio"/>
Decorative strips in the centre roof supports from below	<input type="radio"/>
Decorative strips in the side roof supports facing out	<input type="radio"/>
Decorative strips in the posts	<input type="radio"/>
Tension rod in the outer roof panels	<input type="radio"/>
Preparation for 230 V mains connection in the guttering and wall bracket	<input type="radio"/>

Accessories

Underlay sun protection	<input type="radio"/>
Overlay sun protection	<input type="radio"/>
Vertical sun protection	<input type="radio"/>
Vertical glass elements	<input type="radio"/>
Tempura/Tempura Quadra heating system	<input type="radio"/>

Post

115 post (square)	<input checked="" type="radio"/>
-------------------	----------------------------------

Guttering

105 guttering	<input checked="" type="radio"/>
---------------	----------------------------------

Depending on the design, differing distances between centre lines and the resultant additional roof panels can occur. Other individual shapes and maximum dimensions possible upon request.

● standard ○ optional — unavailable

Details about weinor Terrazza Pure

Terrazza Pure scope of delivery

All the small parts required to install a Terrazza Pure roof are supplied as standard. Please also note any possible different or additional statements in the commercial or technical confirmation of the order.

Terrazza Pure Planning/Site Measuring

- Accurate site measuring is a basic requirement for the job to be carried out well. It is the foundation for the roof's production and to establish other construction requirements.
- weinor needs the roof dimension you want. Please make a note of obstacles like: protruding walls, rainwater downpipes, etc.
- Remember: the roof must be aligned straight.
- Carefully mark the cutting check and location of the special features you noted on site.
- Ideally, take digital photos of the installation site. Your technicians will be grateful for the more detailed information from good photos later on. The weinor staff can then get a better idea of what the site looks like and possibly provide you with non-binding details.
- Also measure the current situation on your building site. This makes it easier to talk about any necessary changes without measuring the site again.
- Unless otherwise specified, the glazing elements will be provided in the specified standard version.
- When designing the glazing elements and specifying glass thicknesses, the relevant statutory regulations must be observed at all times. weinor plans the glazing elements according to the lowest wind load (installation height: 0–8 m; dynamic pressure: 500 N/m²) and applies the specified standard glass thickness to the glazing elements. If different GE types are being used, this may result in deviations in the shape and/or colour of the various handles and glazing beads.
- The owner and customer are ultimately responsible for the statics design of the roof, glazing elements and accessories. In this context, the relevant valid statutory regulations must be observed, in particular Eurocode DIN EN 1990 and 1991, which define wind and snow loads.
- Powder coating: All weinor patio roof and glazing element surfaces are always supplied powder-coated. Caution, deviations in colour: the degree of sheen in the coating and different powder manufacturers may lead to deviations in colour occurring. The critical colours are RAL 9006 and RAL 9007 as well as all metallic (WT) colours.
- As a rule, production will not commence until after written approval of the order. Orders placed via the E-Shop are accepted without written approval and forwarded

to Production immediately after the order confirmation has been dispatched. No collateral agreements will be accepted as part of the contract.

- Changes to orders made after an order has been approved are only possible in certain instances depending on how far along the production stage has advanced and will therefore incur an additional charge.

Sun protection

- You can either provide sun protection for the Terrazza Pure roof using a WGM Top or undermounted Sottezza II conservatory awning.
- The weinor VertiTex II can provide sun protection for the front and sides. This also provides glare and privacy protection.

Installation

- Check the structural conditions: foundation, floor panel, cutting check, masonry
- Check the drawing according to Engineering
- Preparatory work:
 - Check the roof and accessories scope of delivery with parts list/drawing from the confirmation of the order
 - Unpack the scope of delivery
 - Check it for damage
 - Start installation
 - Instructions are available for installation.

Recommended installation material (not in scope of delivery)

- Fixings for mounting the roof to the wall and floor
- Fixings for glazing elements
- Glazing blocks, silicone, sealing glue, Kompri-Band, films, filler cord, insulation material, PU foam
- Weather protection angle bracket above the wall bracket
- Spacers for shimming glazing elements onto the floor

In case of complaints

If something appears to have not been carried out to your satisfaction:


- Take a photo of the package concerned (if possible, a digital photo).
- Make a detailed note of the causes, e.g. the actual dimensions of the supplied package. Our technicians can then compare the dimension with the target dimension to quickly establish the causes.
- Make a detailed note of the target dimension you would have expected. Our technicians can often draw important conclusions from this and give you more tips
- Please immediately contact the weinor office.

Innovative glass support system




Glass support system from weinor

weinor developed the unique glass support system especially for Terrazza Pure. The supported glass support system forms a slope inside the straight roof support. This ensures the reliable drainage of water over the emergency drainage gutter and at the same time provides the cubic look.

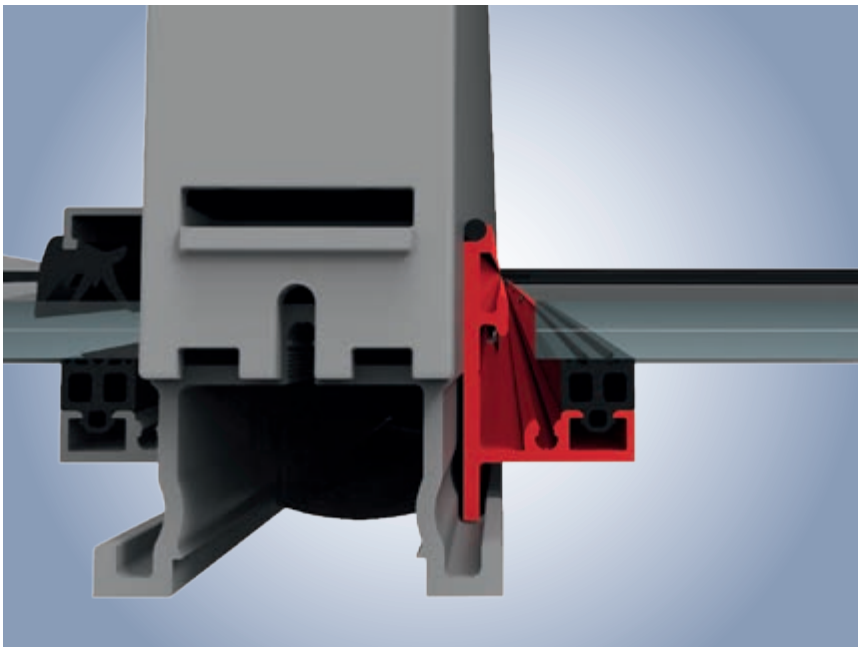



The glass support profiles are continuously supported flush in a groove over the entire length of the roof support. This produces maximum resilience that can also be calculated structurally.

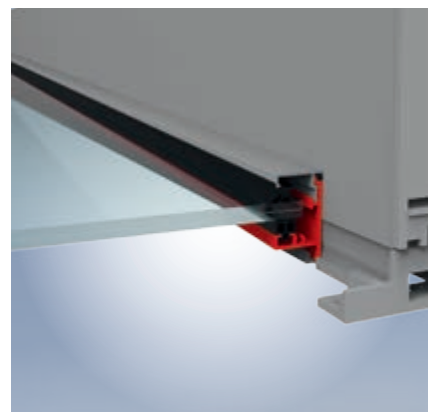

Innovative glass support system

Glass slope

For the glass slope in a straight roof support the glass support profile is mounted with a fixed pitch depending on the roof pitch.

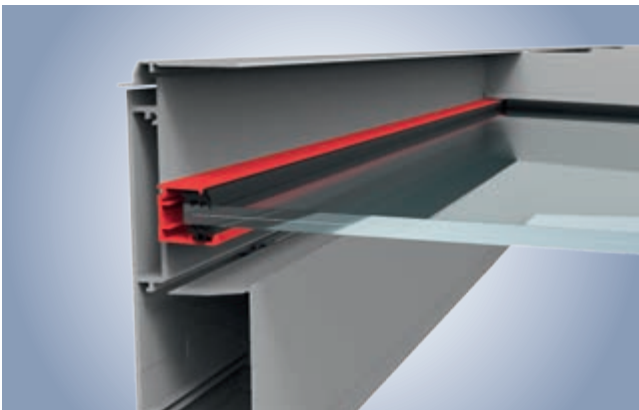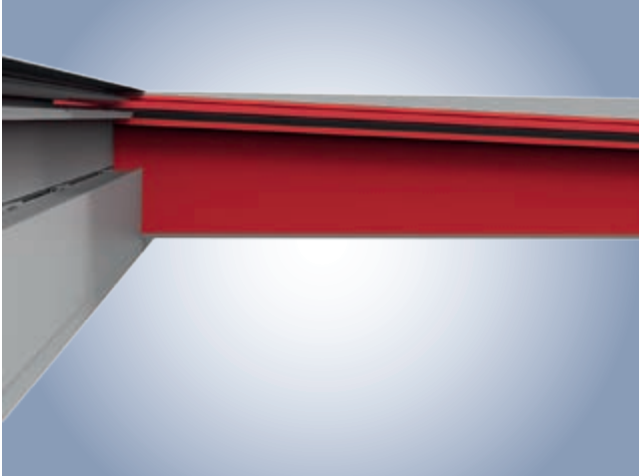


The glass support on the wall bracket varies due to the permanently fixed glass pitch. The glass is lower with a low roof depth. The glass is higher with a large roof depth. The bar for the glass support is pre-drilled and bolted to fit the wall bracket when the roof is mounted.




Standard version

Side roof support

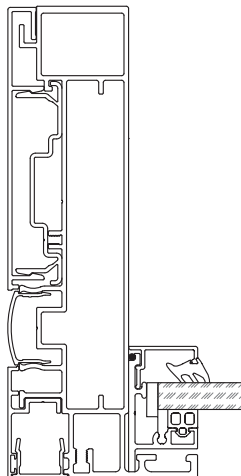

The side roof supports are fitted with decorative strips in the system colour as standard.


Centre roof support

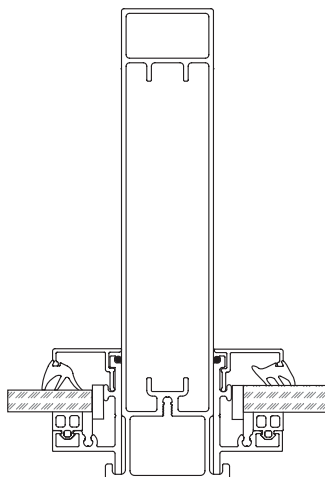


The centre roof supports are supplied without decorative strips or colour LED strips from below as standard and are designed as closed roof supports.

Posts

The Terrazza Pure posts are designed with a continuous post faceplate as standard.



Outside post




Centre post / wall







Decorative strips

Side roof support

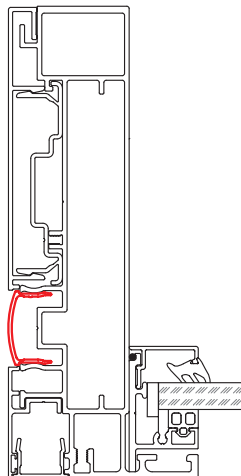

The side roof supports can be fitted with decorative strips on the outside as an option. Coloured decorative strips are always fitted in both side roof supports. Exception: there is a continuous wall on the side.


Centre roof support, underside

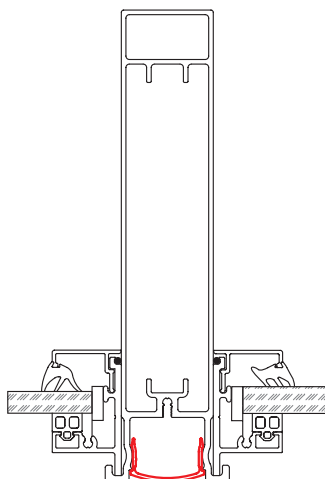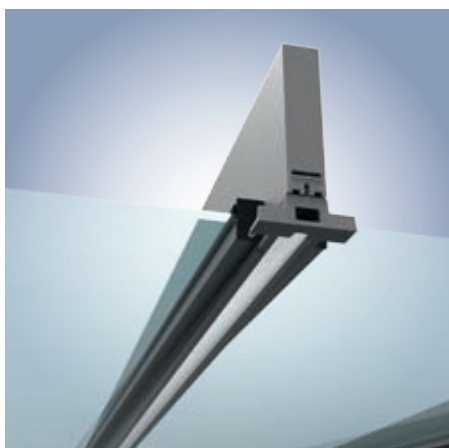

The centre roof supports can be fitted with decorative strips from underneath as an option. Coloured decorative strips can be chosen individually for each of the centre roof supports.

Posts

The posts can be fitted with coloured decorative strips outside in pairs as an option. Middle/wall posts cannot be designed with decorative strips.



Outside post



Terrazza Pure – exclusive decorative strips



With the 5 decorative strips (silver aluminium, copper aluminium, brown aluminium, brass aluminium and anthracite aluminium) you can break totally new ground with your patio design. The anodised aluminium material gives your Terrazza Pure an elegant look.

The decorative strips can be integrated:

- Across the entire length of the posts' outsides
- On the underside of the centre roof support
- Sideways on the outer roof supports



Silver aluminium

Copper aluminium

Brown aluminium



Brass aluminium

Anthracite aluminium


(just one decorative colour can be chosen depending on the roof, it is not possible to combine colours)

Colour LED strip lighting

Centre roof support

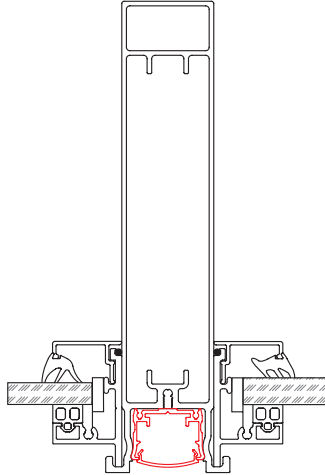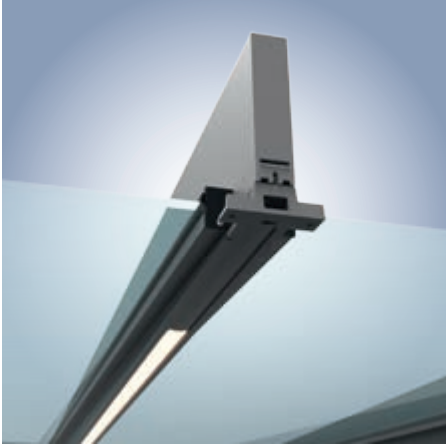


The centre roof supports can be fitted with high-quality colour LED strips outside as an option. The colour decorative strips can be chosen individually for each of the centre roof supports. The length is based on the roof depth. Lighting is not possible in side roof supports.

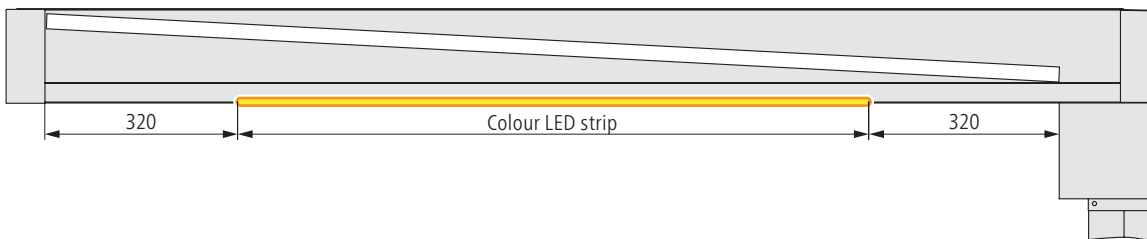

Posts

The posts can be fitted with high-quality colour LED strips outside as an option. They are always fitted outside in both posts.




Outside posts

Colour LED strip
1,600 mm at top

Colour LED strip
400 mm below


Min.
300 mm

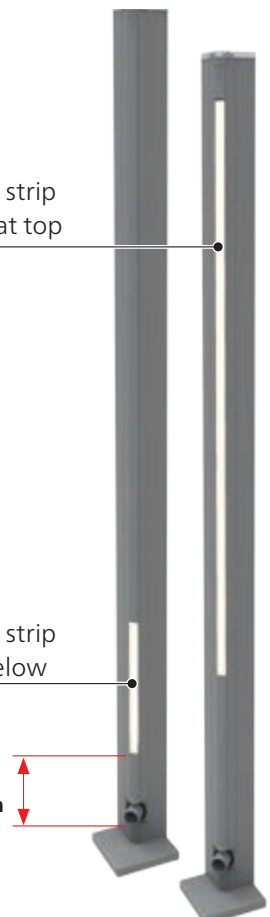

Note:

If a middle/wall post has to be used (e.g. with a lateral wall) or outside posts are indented, they do not have lighting. The colour LED strips are always the same length for both posts. Drainage through the post always has to be out of the post underneath the lighting. The colour LED strip has to be at least 300 mm above the drainage or water level. The guttering height must be stated with the order (PA dimension).

Controls for colour LED strips

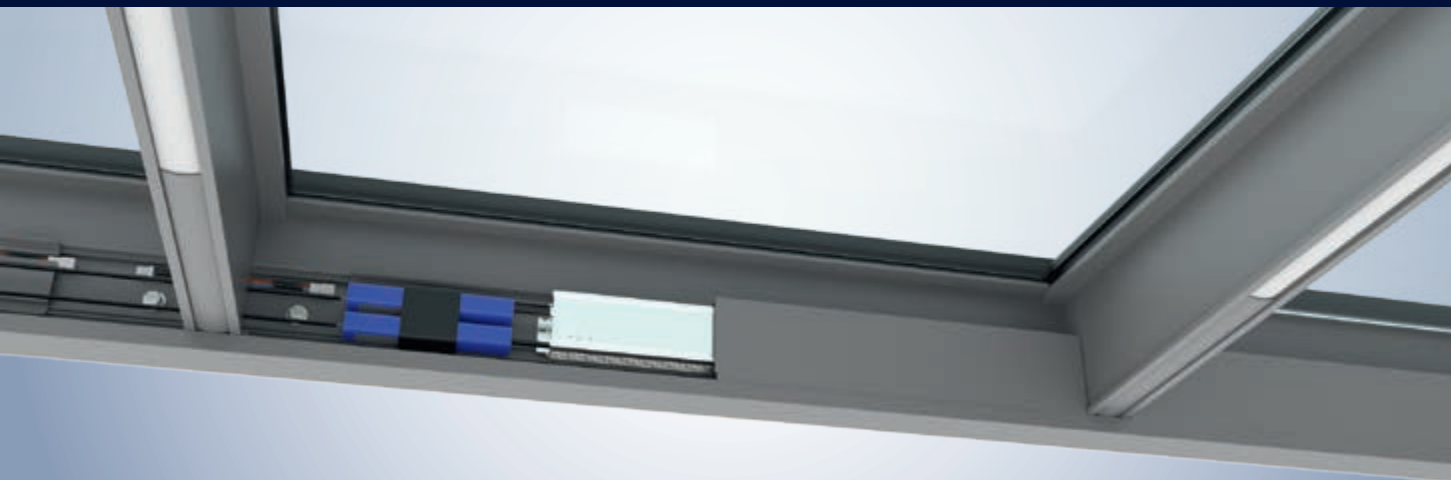

BiRec RGB radio control with 48 V power supply pack integrated in wall bracket

Controls

The required electronics and controls are located in the wall bracket. They are installed using Plug&Play, the ready to plug in cabling is already fitted in the roof. It is only possible to control the colour LED strips using the weinor BiConnect and BiEasy 15M Go! hand transmitters.



Wall bracket with plenty of space for electronics and cabling with faceplate. Quick access to the electrical installation is possible at any time thanks to the removable faceplate.

The BiConnect controls for colour LED strips are available in 2 versions.

Lighting in	Controls	Output	Circuit
Centre roof support	BiRec RGB 48 V with 48 V power supply pack	max. for 8 roof supports with lighting	all roof supports synchronous
400/1,600 post	BiRec RGB	max. 2 posts with lighting	both posts synchronous

All roof supports are controlled together (colour/brightness).
Both posts are controlled together (colour/brightness).

Note:

If the roof support/post lighting is operated at the same time using one dispatcher channel, this may lead to unsynchronised actions (power-on/colour adjustment/dimming) for technical reasons.




BiEasy 15M Go! Hand transmitter

Cabling concept

LED connector

For integrated color LED lighting, the cabling is integrated in the components – weatherproof, protected from sight and optimally prepared at the factory. This guarantees a pleasing appearance and a safe installation. Here are the details of the controls and connectors shown.

Connection option	Connection points	Version
LED in roof support	preassembled cable harness behind the WAP faceplate	plug connector pre-assembled at factory and routed in the profiles
LED in post	preassembled cable harness behind the WAP faceplate, through the side roof support into the post	plug connector pre-assembled at factory and routed in the profiles

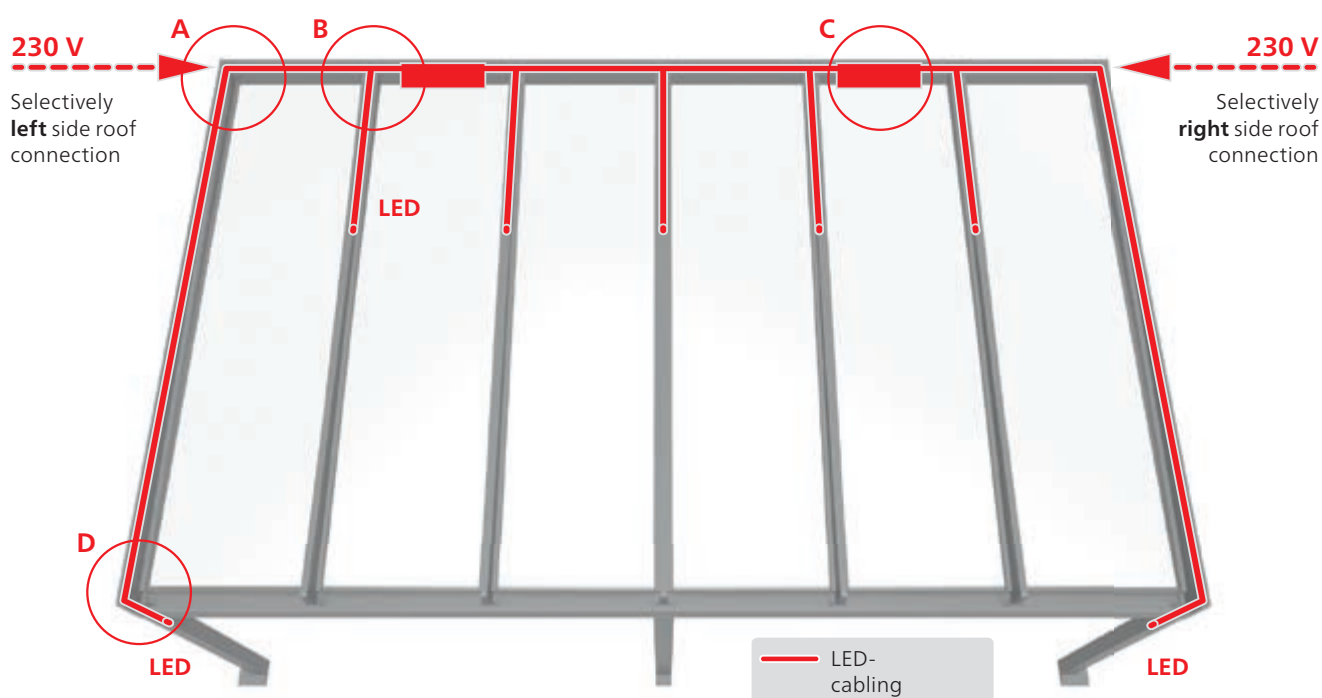

A Cabling LED at the outer roof support



B Cabling LED at the middle roof support



C Wall connection with transformer and pre-assembled plug-in controls for LED color strips




D Cabling LED at the roof support and post

Cabling concept

Preparations for the mains connection of optional electricity consumers on the guttering and wall bracket

The power supply for optional electric components (e.g. a Tempura Quadra) is supplied on site using the E-Box in the in the guttering or on the wall bracket. The connecting lead is simply routed through the side roof support when mounting the roof.


Connection option	Connection points	Version
I. Preparation for mains connection 2	centre of guttering, one electricals box center of wall bracket, behind the WAP faceplate	Per connection a 3 x 1,5 mm ² rubberline with Hirschmann coupling, cabling routing during roof installatione
II. Preparation for mains connection 4	guttering divided into three wall bracket divided into three	Per connection a 3 x 1,5 mm ² rubberline with Hirschmann coupling, cabling routing during roof installation

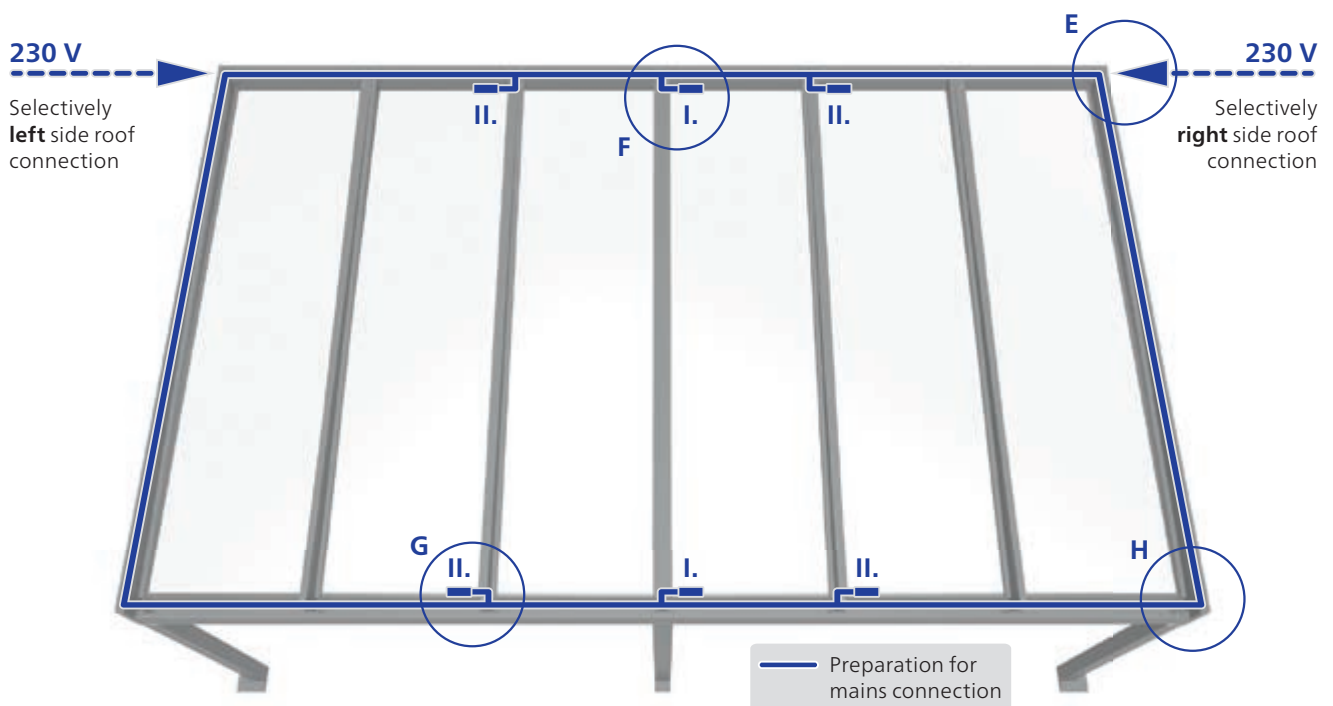

E Main connection 230V either on the left or right (on the example on the right)



F Preparation for mains connection on wall bracket e.g. for Tempura Quadra

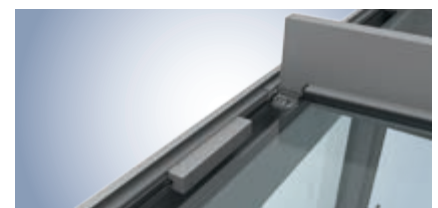

G Preparation for mains connection with E-box in the guttering e.g. for Tempura Quadra




H Side roof support open for easy cable laying up to the gutter


Terrazza Pure Planning

Cross-sections and dimensions

Terrazza Pure (roof depth 1,600 mm to 2,599 mm)

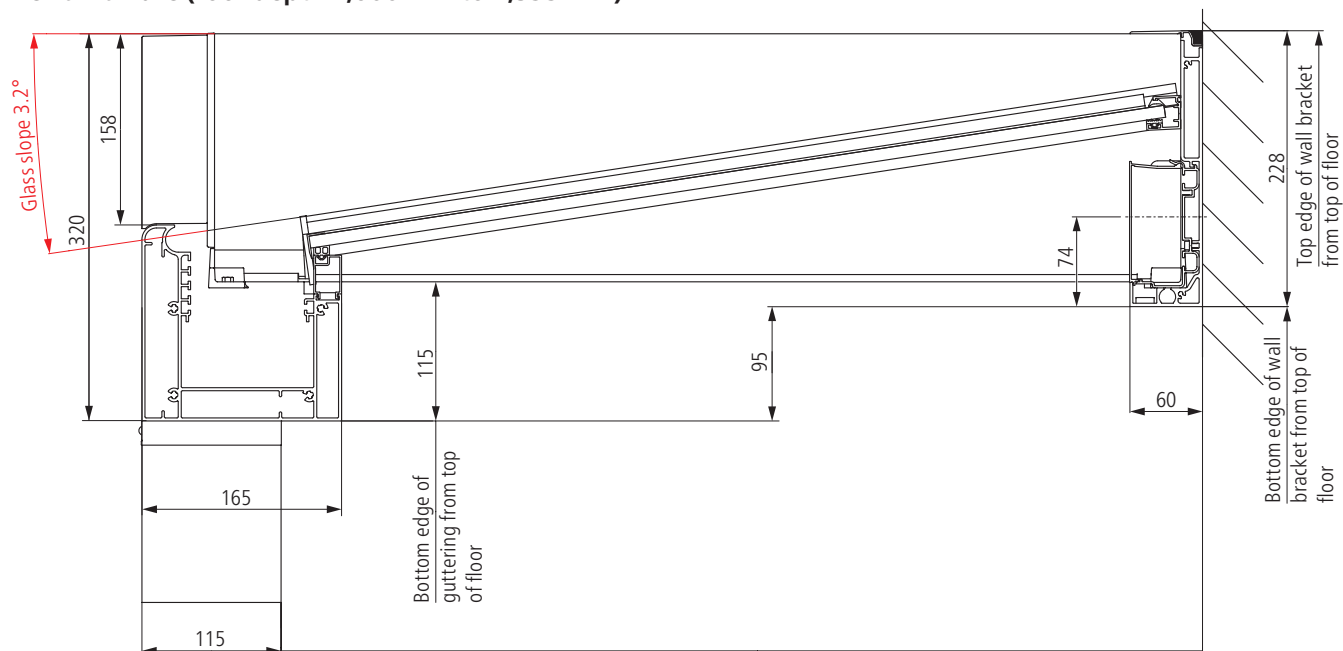


Terrazza Pure (roof depth 2,600 mm to 4,000 mm)

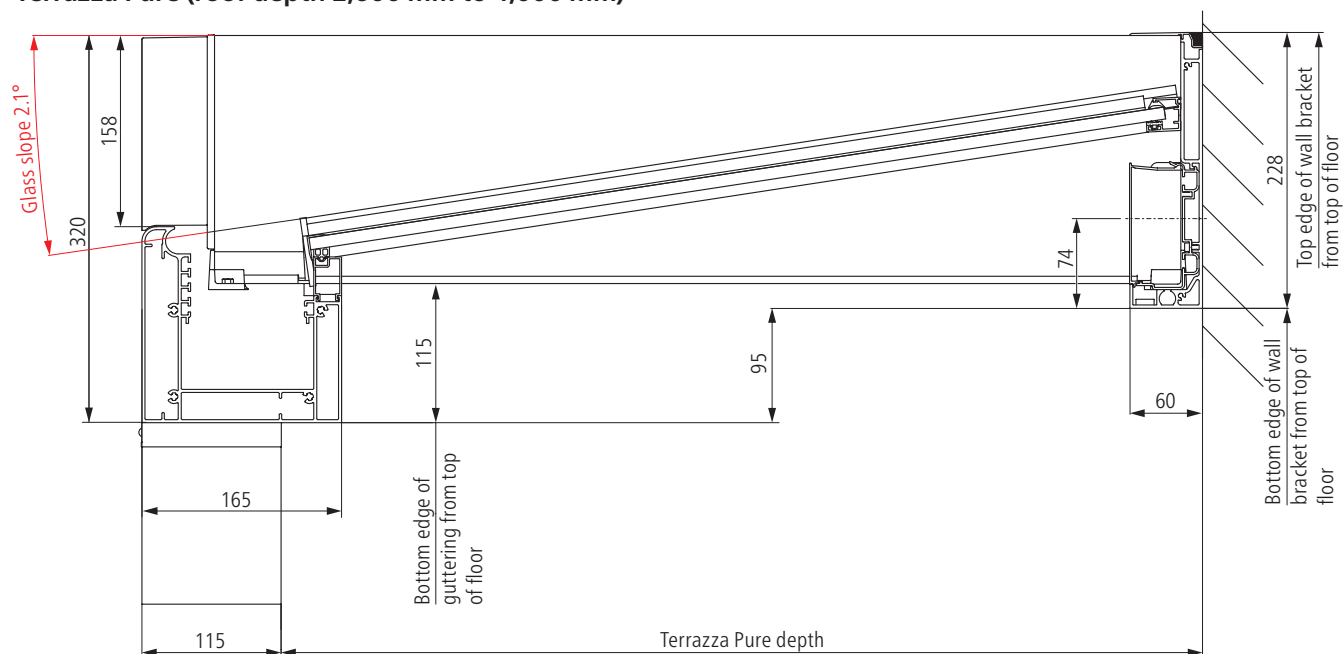


Cross-sections and dimensions


Roof support profiles

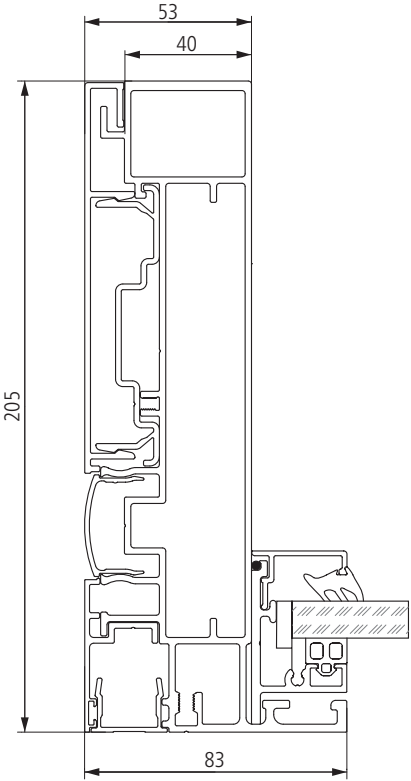


Side roof support (left/right)

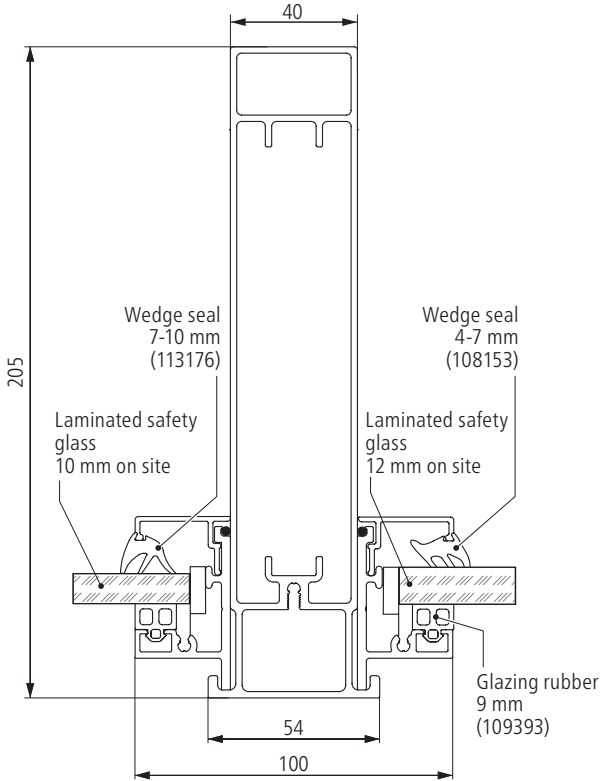

Standard centre roof support

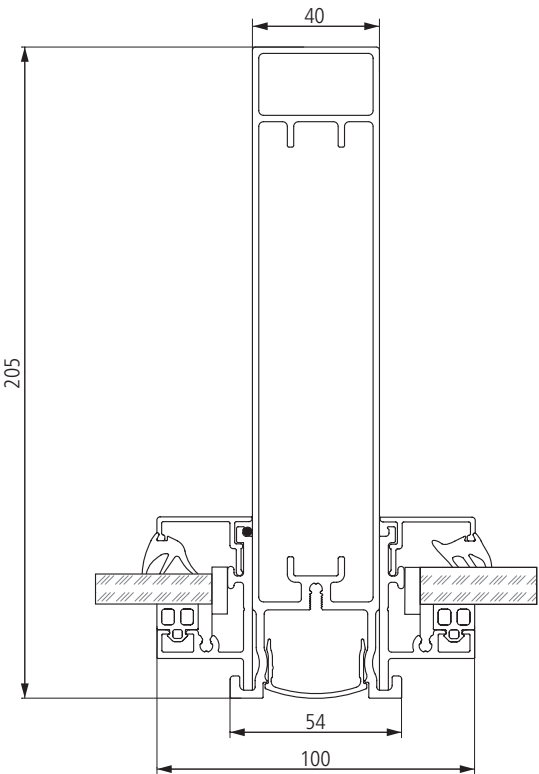

Centre roof support with decorative strip

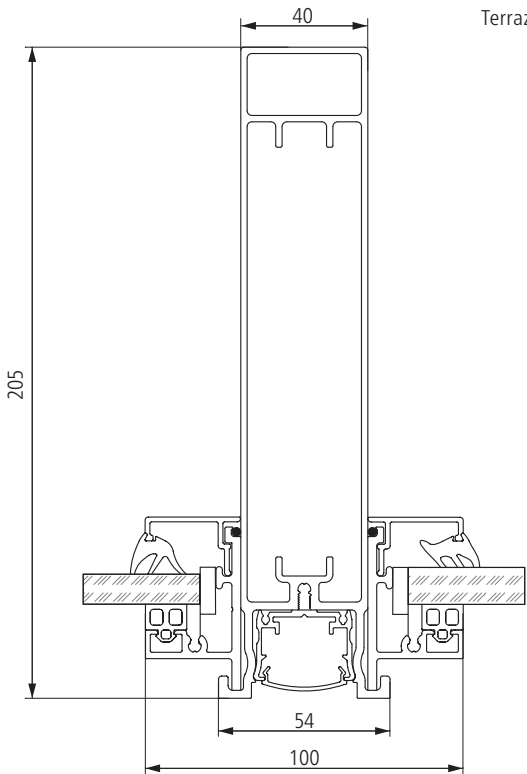


Centre roof support with colour LED strip


Terrazza Pure width

Cross-sections and dimensions


Roof support profiles with optional 140 mm steel reinforcement bar

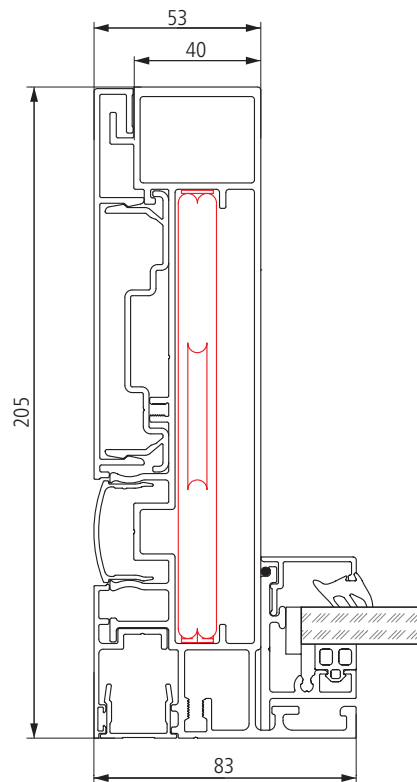


Side roof support (left/right)

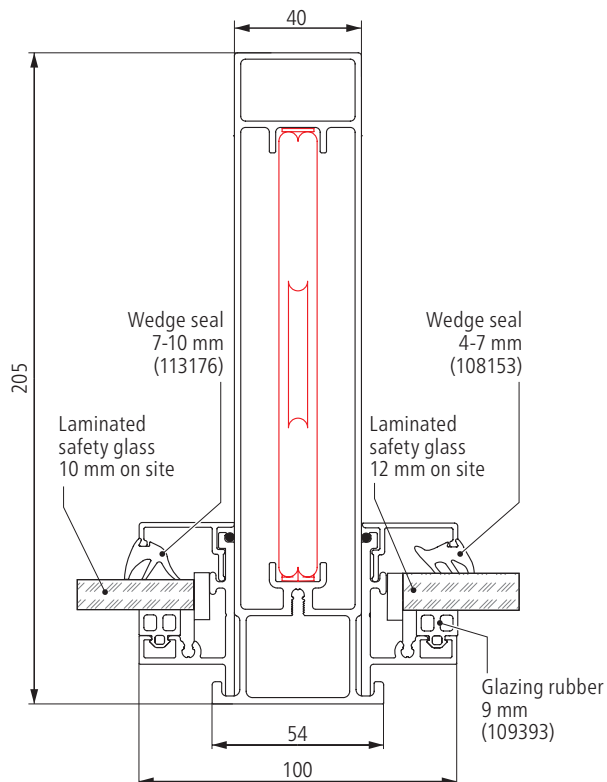

Standard centre roof support

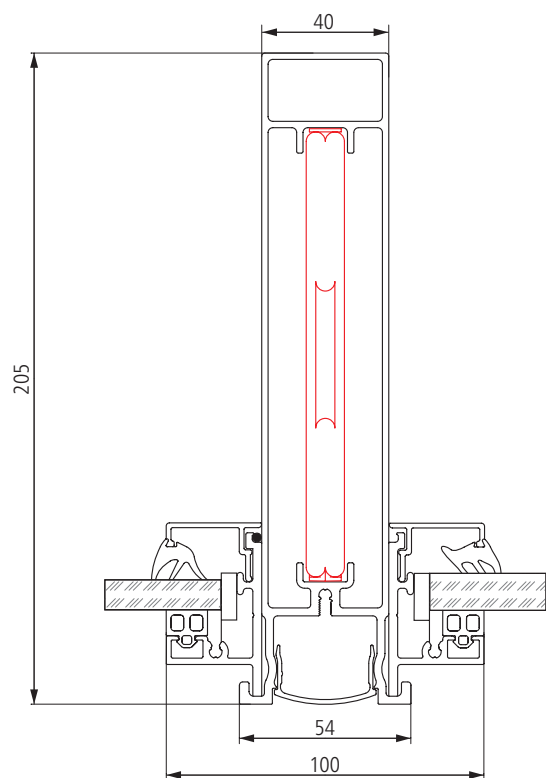


Centre roof support with decorative strip

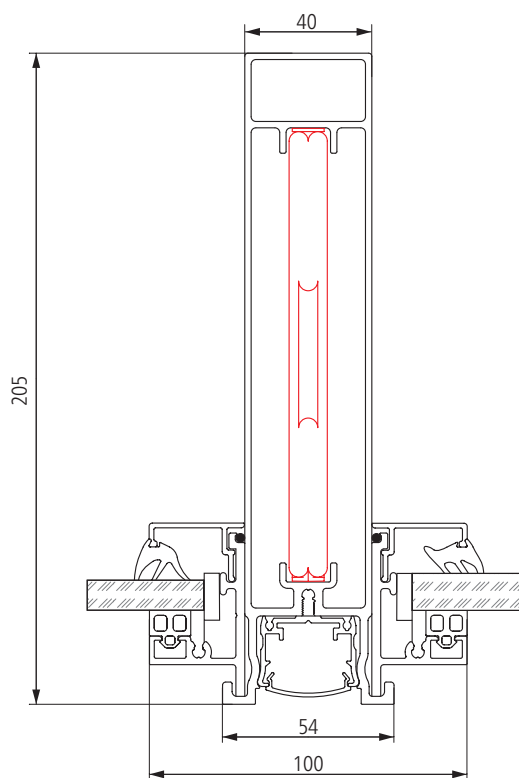

Centre roof support with colour LED strip


Cross-sections and dimensions

Guttering and wall bracket profiles

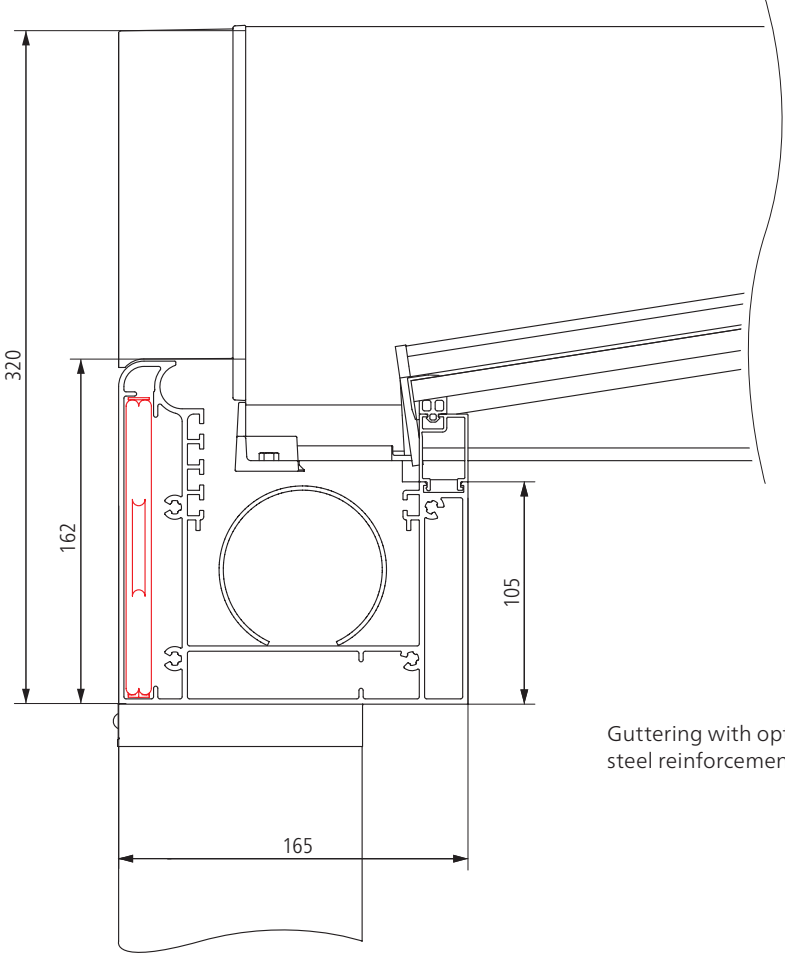


Guttering with optional 140 mm steel reinforcement bar

Wall bracket

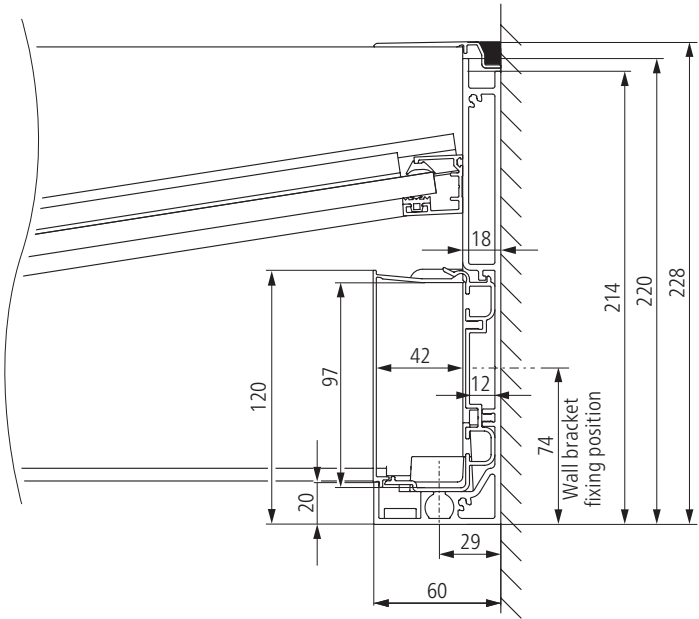


Cross-sections and dimensions

Free-standing (standard)

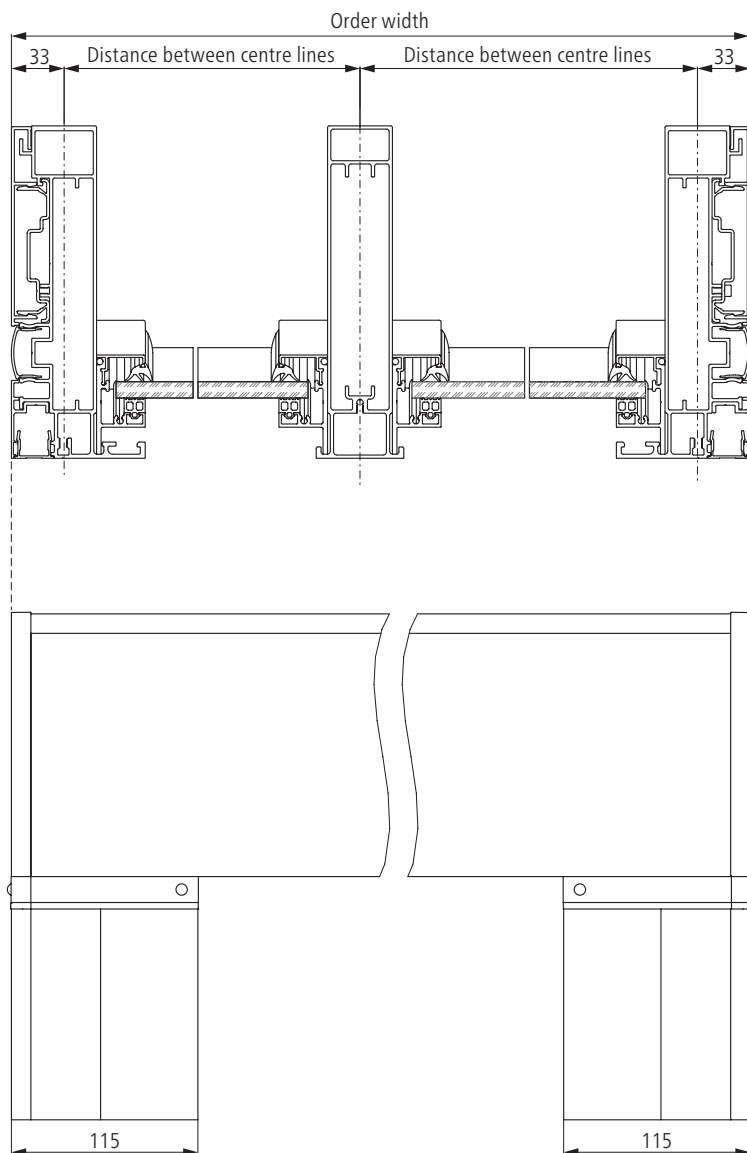


Gutter and post position, free-standing


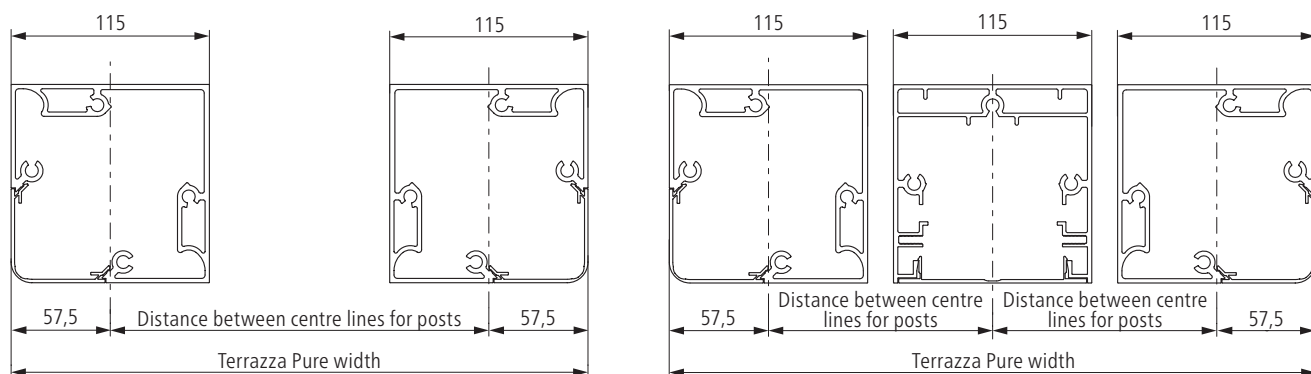


Cross-sections and dimensions


Side wall bracket 5 mm or 100 mm (option)

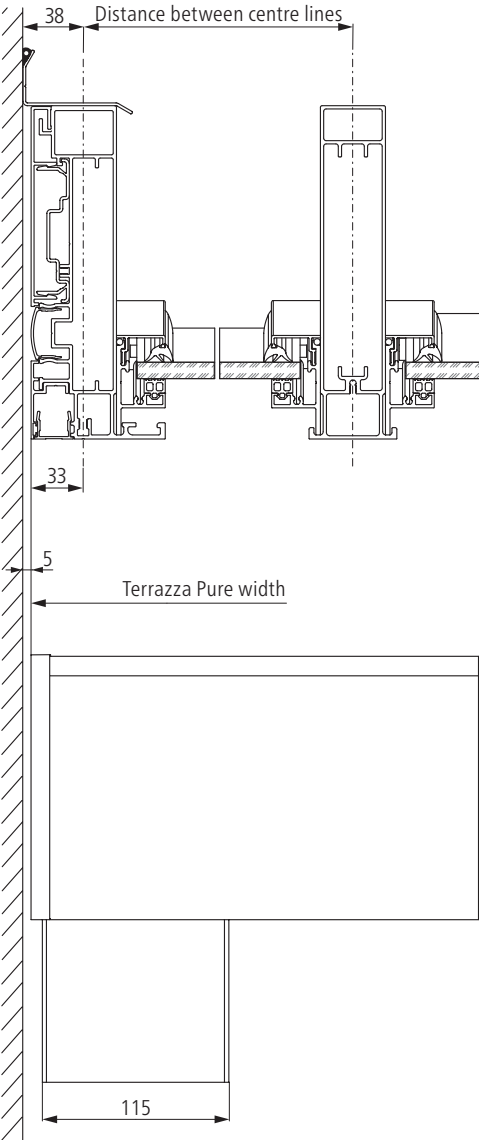

Gutter and post position on a lateral wall – wall offset 5 mm

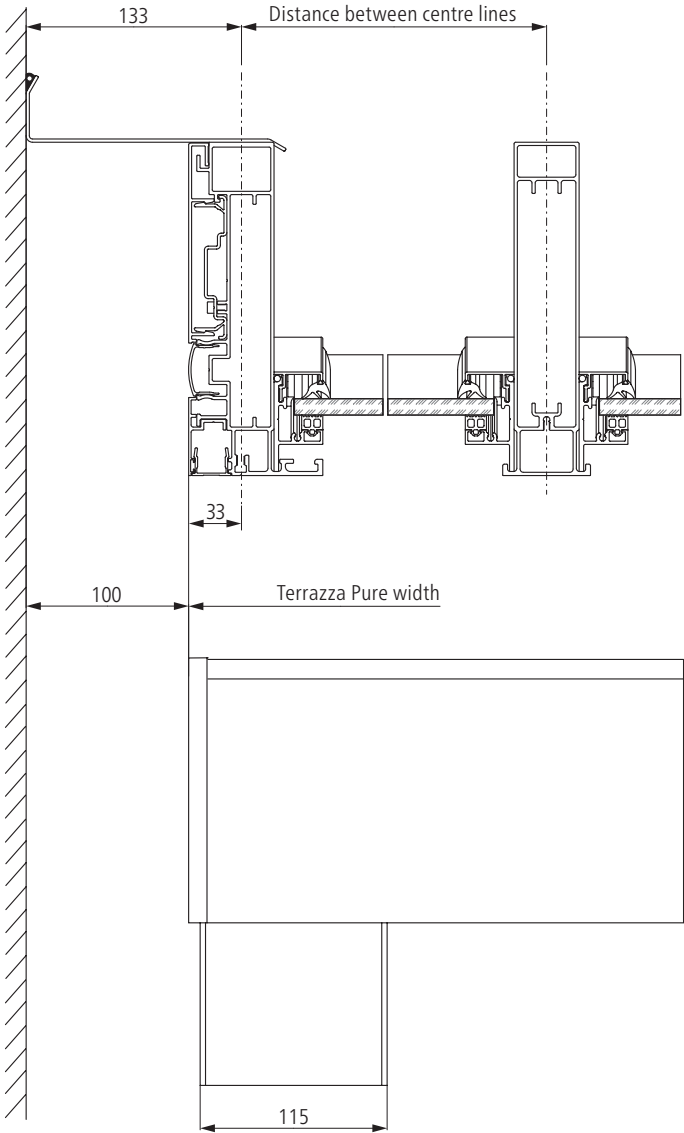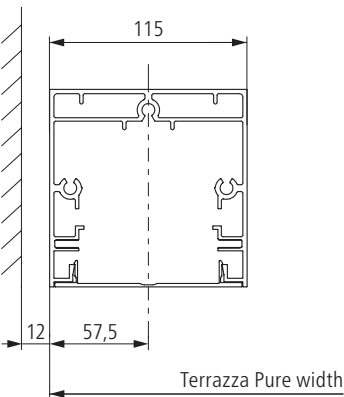

Gutter and post position on a lateral wall – wall offset 100 mm

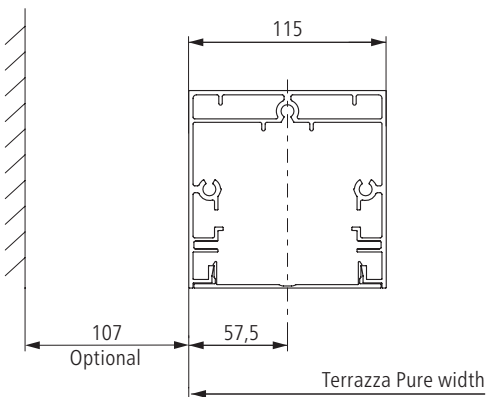


Drainage and posts


Invisibly integrated downspout

Rainwater is discretely and systematically drained away through the integrated water drain. The downspout is invisibly integrated into one of the posts. The drain can also be fed through a post plate, if used.


Outside 115 post

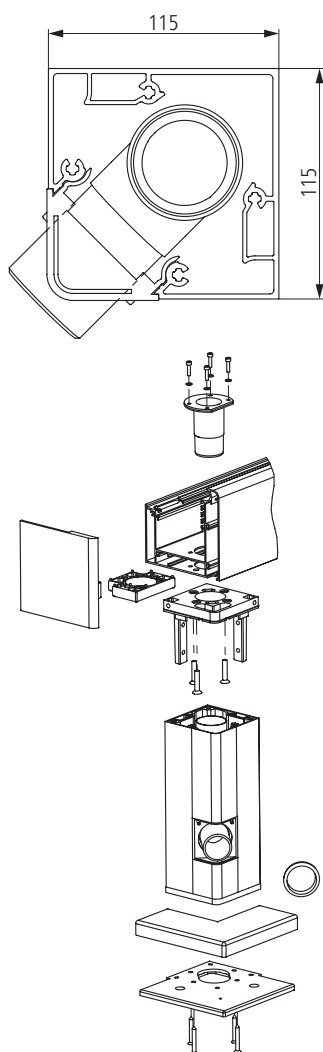

115 centre/wall post

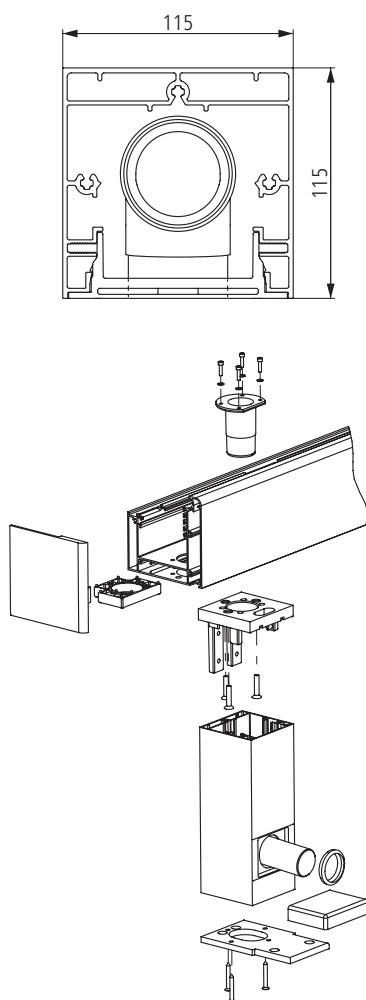

Overflow

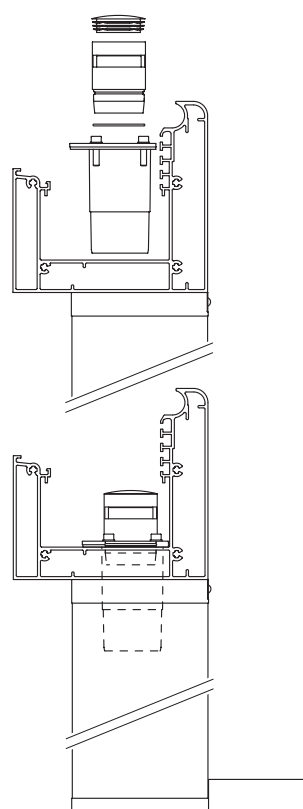

Post corner water outlet



Variable height water outlet



Water outlet at front




Water outlet at bottom




Variable post positions


Terrazza Pure with outside posts

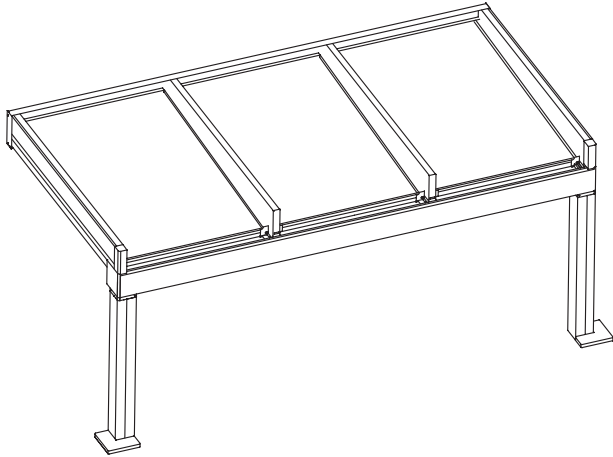

Terrazza Pure with indented posts

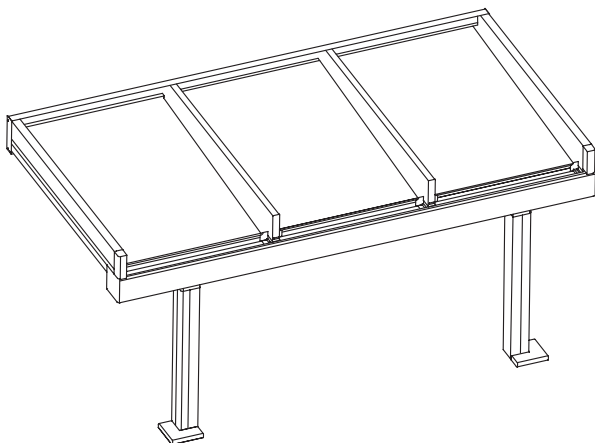

Maximal indent dimension of the posts

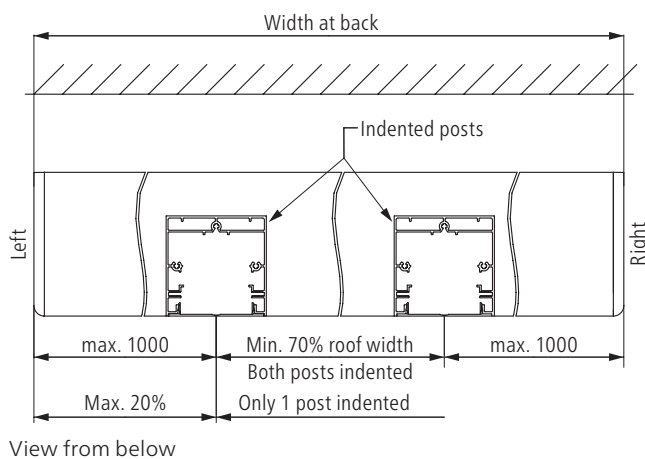


The maximum spacing between the posts can be increased via steel inserts in the guttering. **Caution:** this may increase the weight of the rain gutter. As snow loads increase, the maximum post spacings reduce accordingly.

If the outer posts are indented, the centre post can be omitted for certain roof dimensions. Additional steel reinforcement bars in the guttering or the crossbeam also permit the number of posts and spacings to be changed.


Flexible reactions to structural situations that call for the variable positioning of the posts are also possible.

Posts on guttering

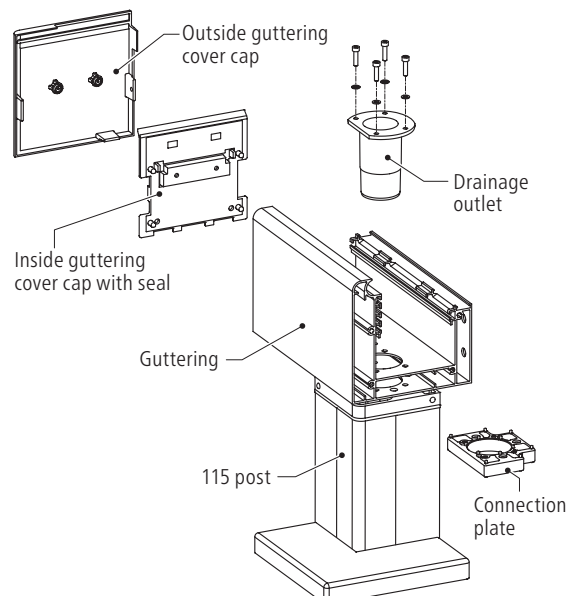


Post fixation

Post plate to fix to the foundation


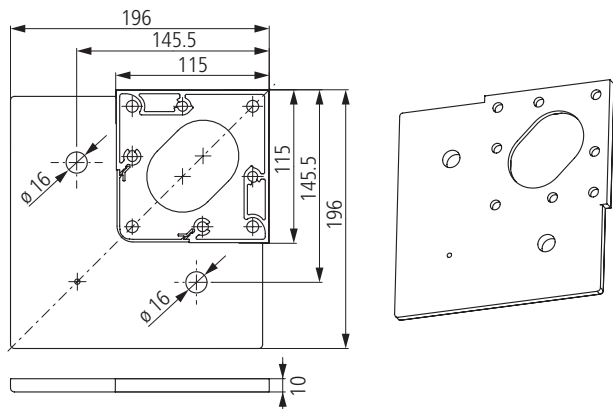


Post plate for 115 outside post

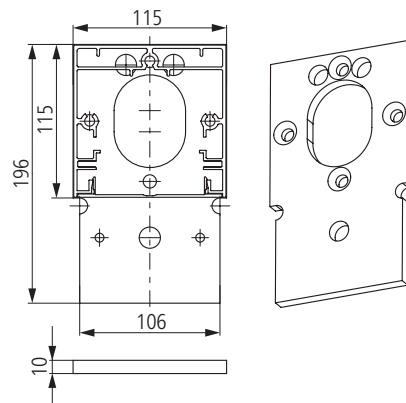


Post plate for 115 middle/wall post

Post plate cover caps and cover for attachment screws

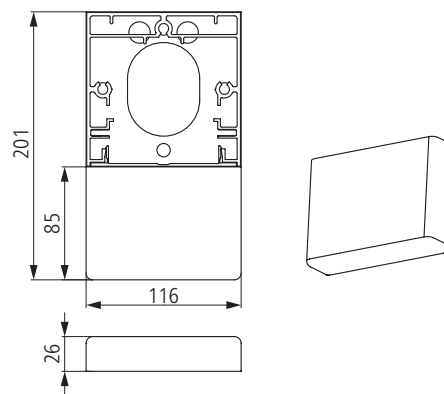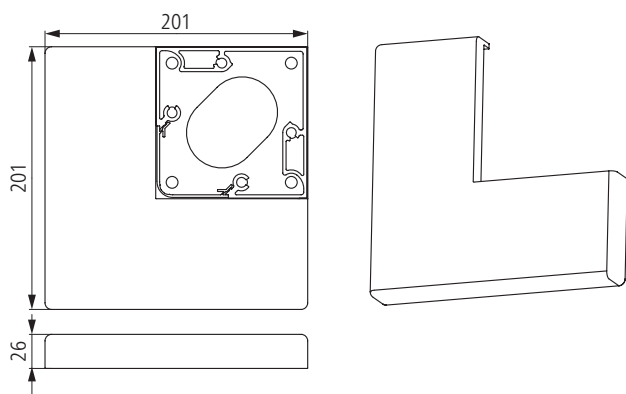

Aluminium base

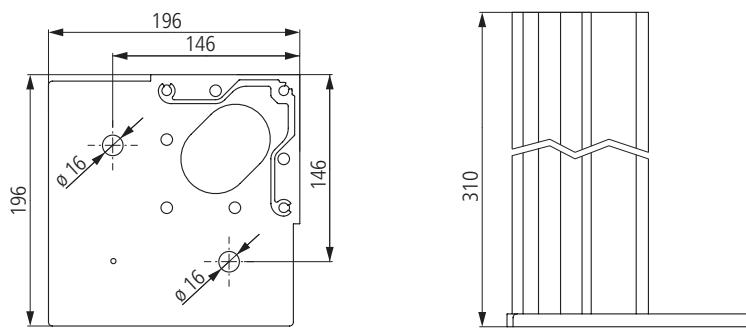


Aluminium base for 115 outside post
(necessary from 3,000 mm)


Post fixation

Aluminium plug-in unit profile

The optional plug-in unit profile for the outside post increases stability with post lengths longer than 2,600 mm.

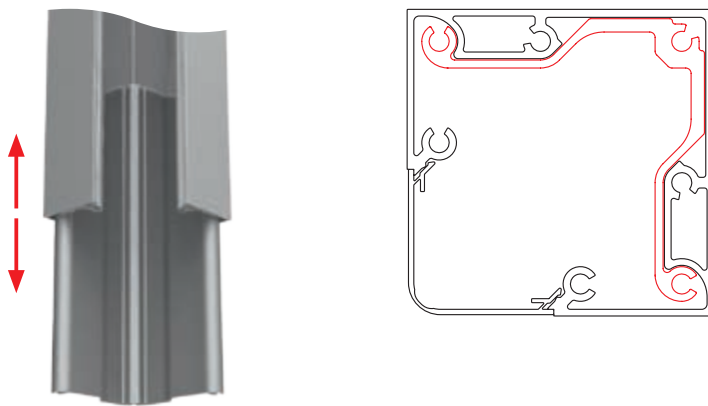

Post installation

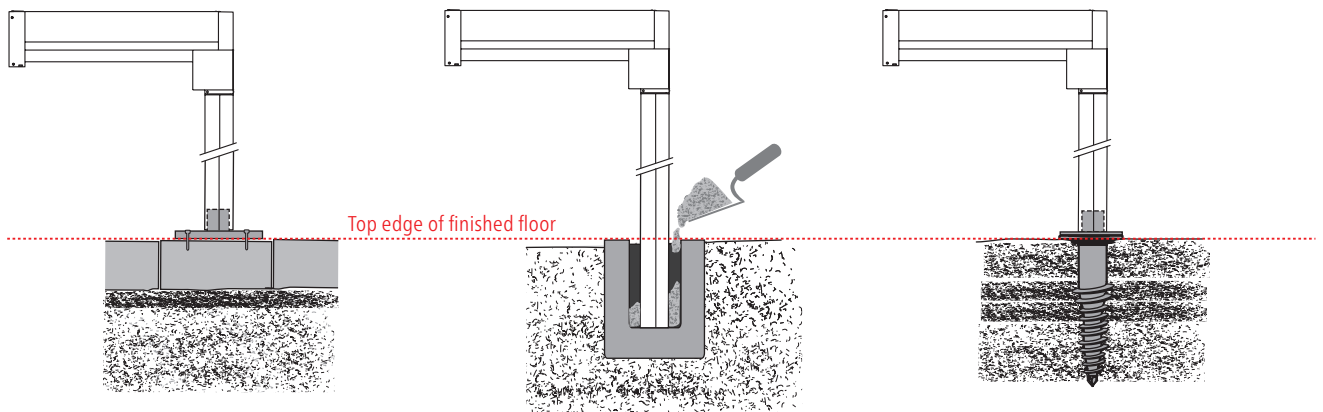


Post fixation on concrete floor slabs or foundations

Bucket foundation

Screw foundation system

Foundation plan

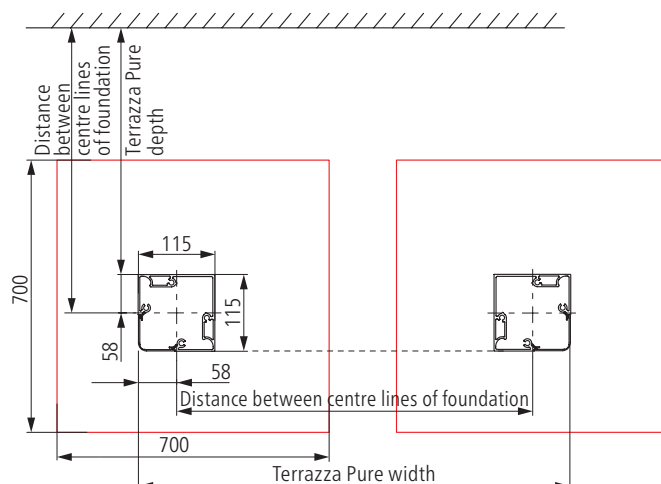

Note:

The specified foundation sizes are guide values and may differ depending on the quality of the ground on site.

Frame widener under roof support




Frame widener under side roof support

A frame widener is used under the side roof supports for the sideways installation of glazing elements or a VertiTex II so that the glazing elements can be positioned ideally. The frame widener under the roof support forms a harmonious unit in combination with glazing elements or the VertiTex II.



There are two versions here:

1. Ordered at the same time as the Terrazza Pure.
2. As a retrofitting version

Up to wall connection profile

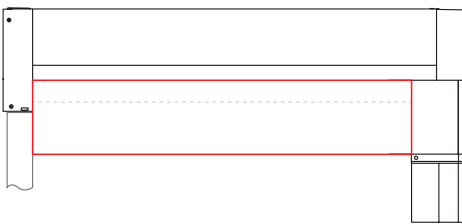


Up to house wall

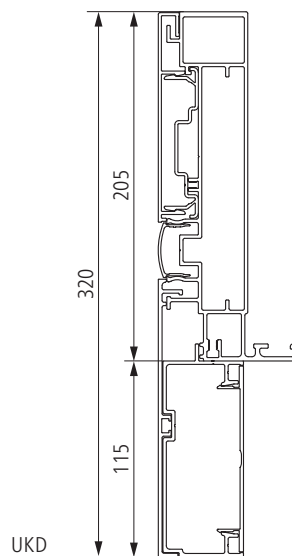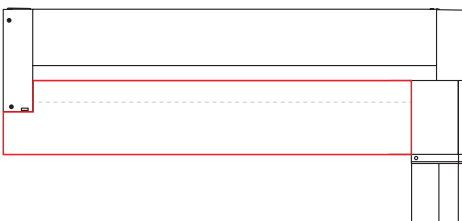



Frame widener under roof support ordered with Terrazza Pure




Up to wall connection profile

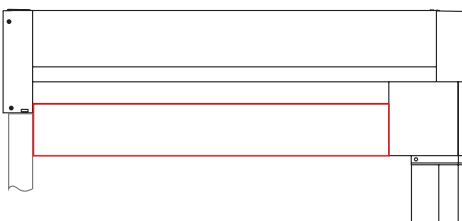

Up to house wall

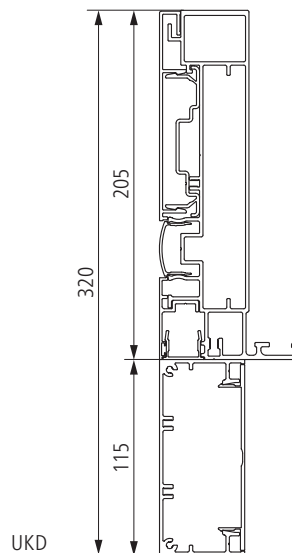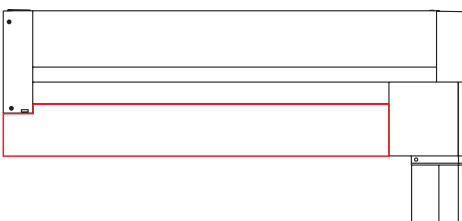

Frame widener under roof support for retrofitting on Terrazza Pure

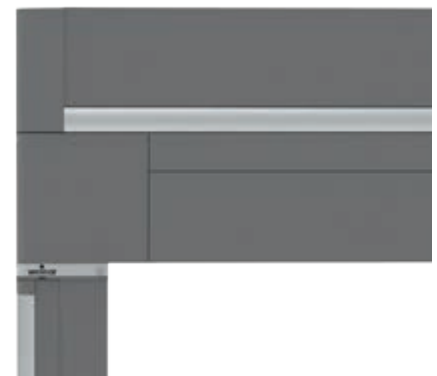


Tension rod

Roof tension rod

A tension rod is necessary in the outer roof panels for sufficient stability with high wind loads. A tension rod can also be designed for all roof panels, on request, for example for visual reasons. The tension rod can also be mounted over the glazing.

Use of tension rod


Terrazza Pure versions	Roof depth	Tension rod
Open	up to 4,000 mm	not necessary
Doubling under side roof support	from 3,501 mm	necessary
Side glazing element	from 3,001 mm	necessary

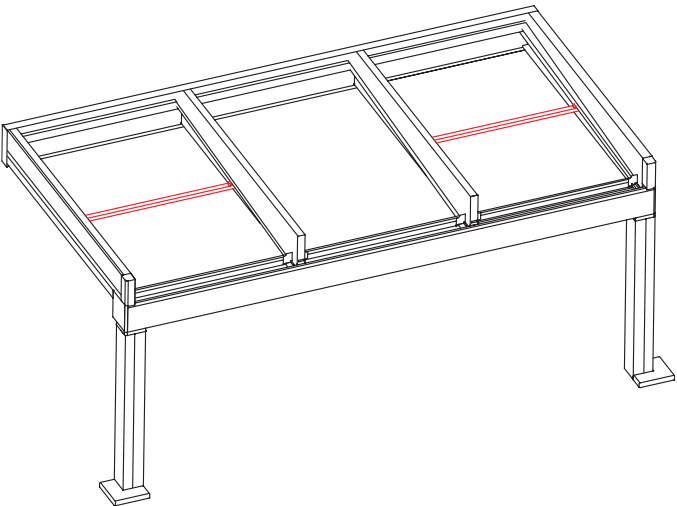


Roof support with ready-mounted tension rod



Tension rod is screwed on when roof is mounted

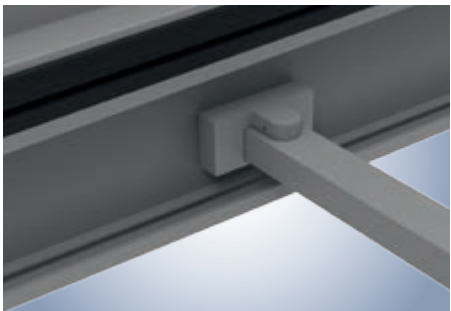

Invisible bolting thanks to cover

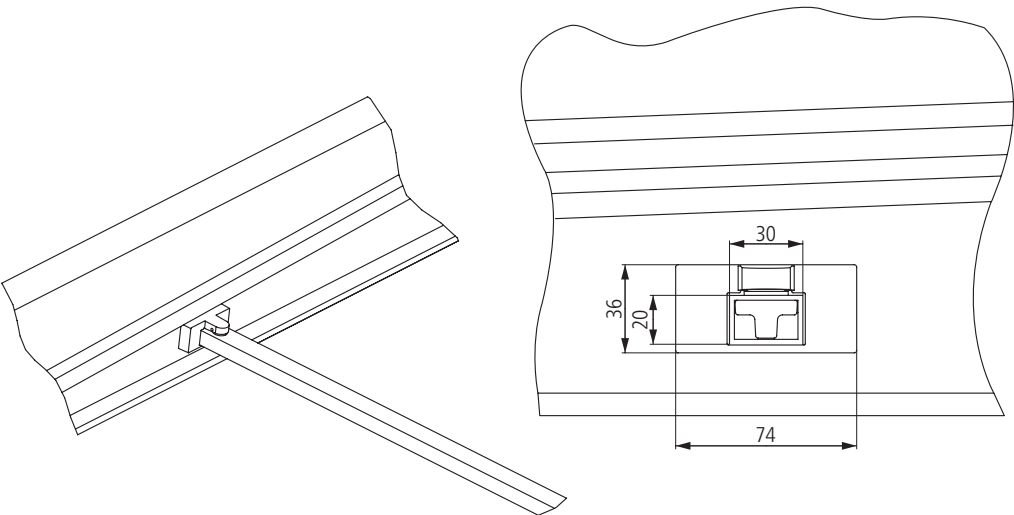

Terrazza Pure Sun protection

Vertical sun protection

VertiTex II




The weinor VertiTex II vertical sun protection offers perfect privacy and glare protection. In a fabric from the screens by weinor® collection, it protects against wind and allows the outside to be seen from the inside (transparent from dark to bright). Available in the following versions:

- VertiTex II rope or guide rails
- VertiTex II Zip


VertiTex II details:

- One piece suitable for large widths up to 600 cm
- Standard installation bottom of bracket = bottom of gutter

VertiTex II Rail/Zip on Terrazza Pure

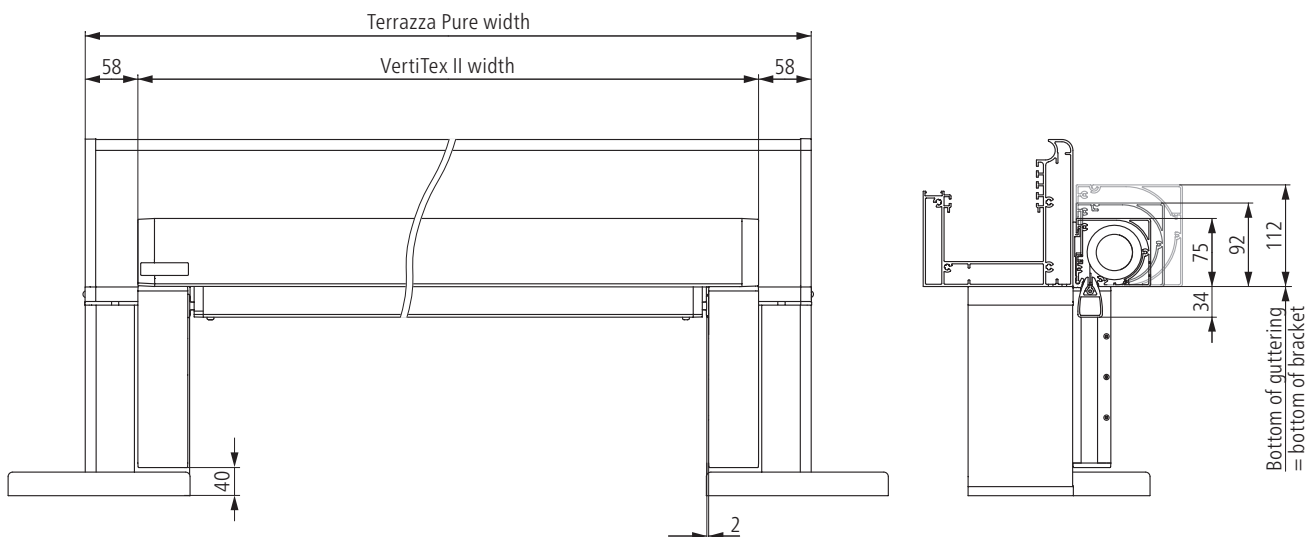



VertiTex II Rail/Zip/Rope on frame widener under side roof support (standard)

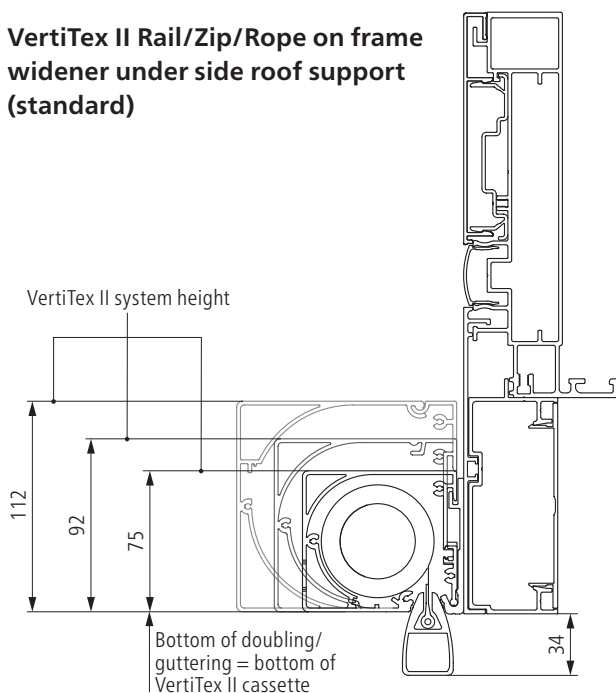


i Additional information can be found in the VertiTex II vertical sun protection system technical folder.

Vertical sun protection

VertiTex II rope on Terrazza Pure

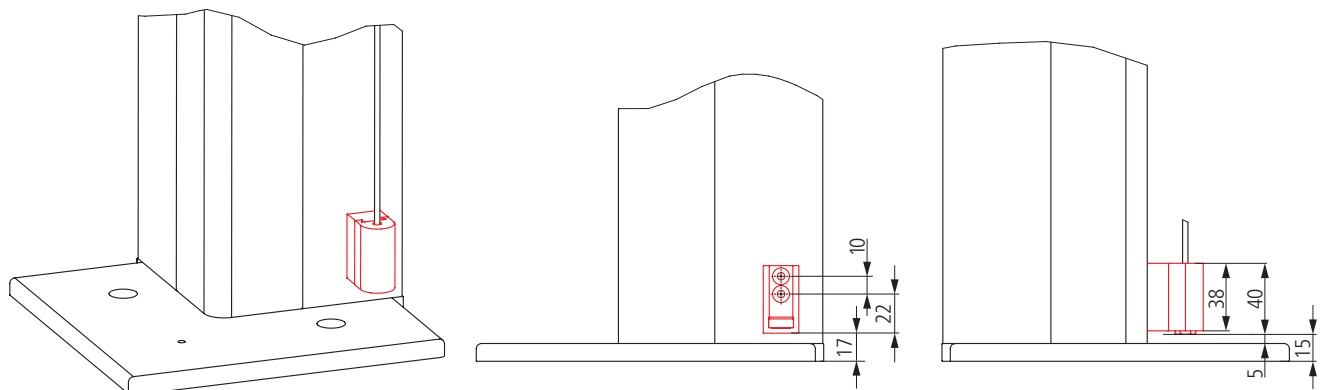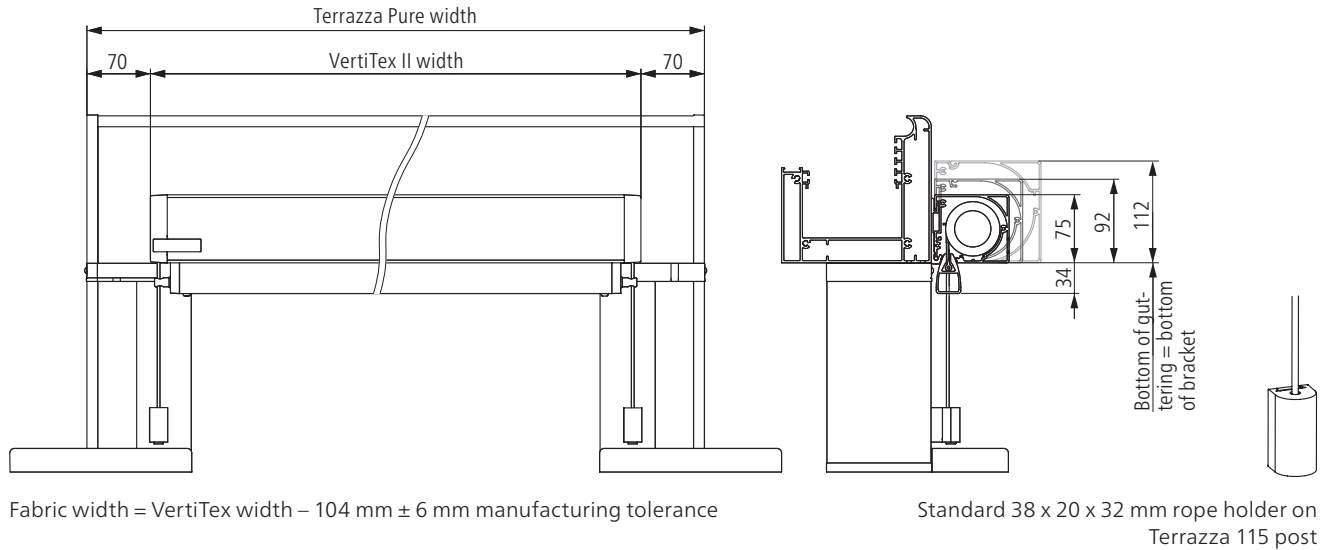




115 post with 38 x 20 x 32 mm rope holder (is used with the "outside rope guide" version)
Caution: Only possible with rope guide next to the fabric

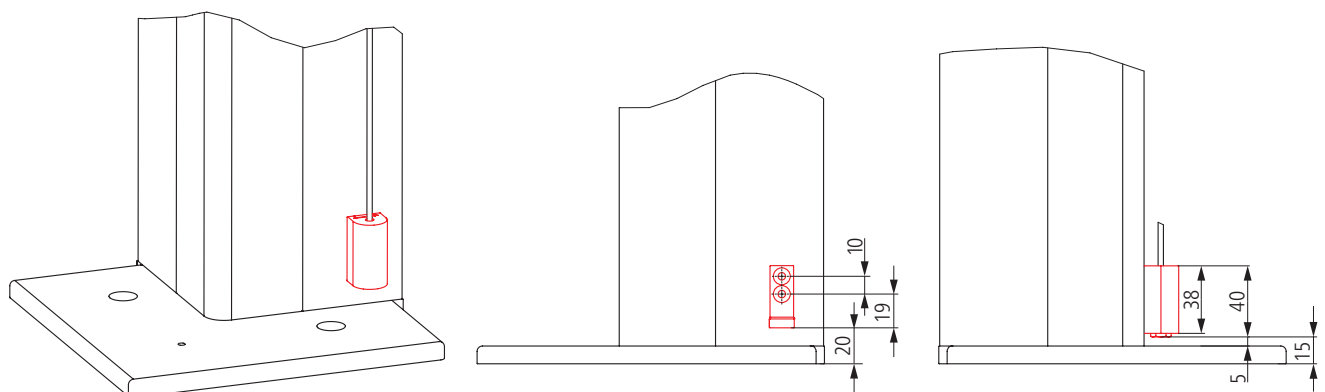

115 post with 38 x 20 x 20 mm rope holder (is used with the "indented rope" version)

Vertical sun protection


VertiTex II 112 rail/zip

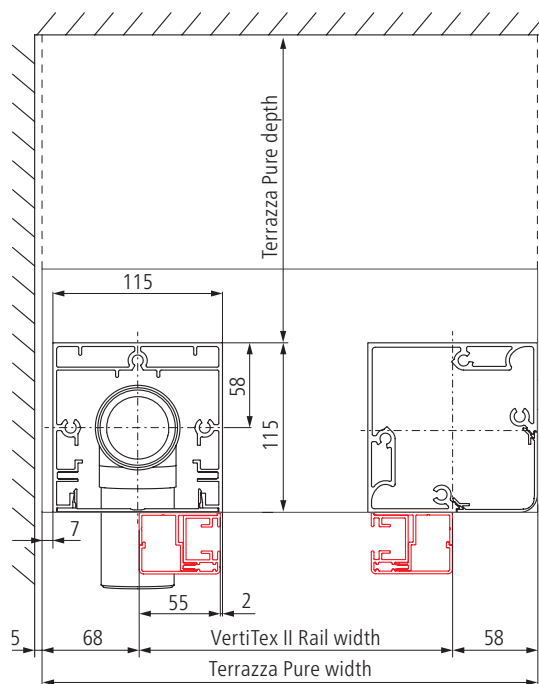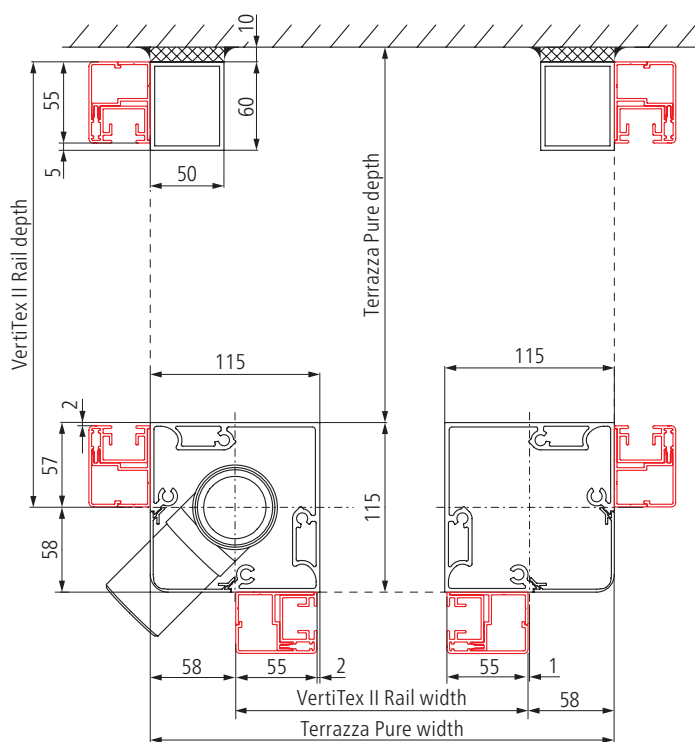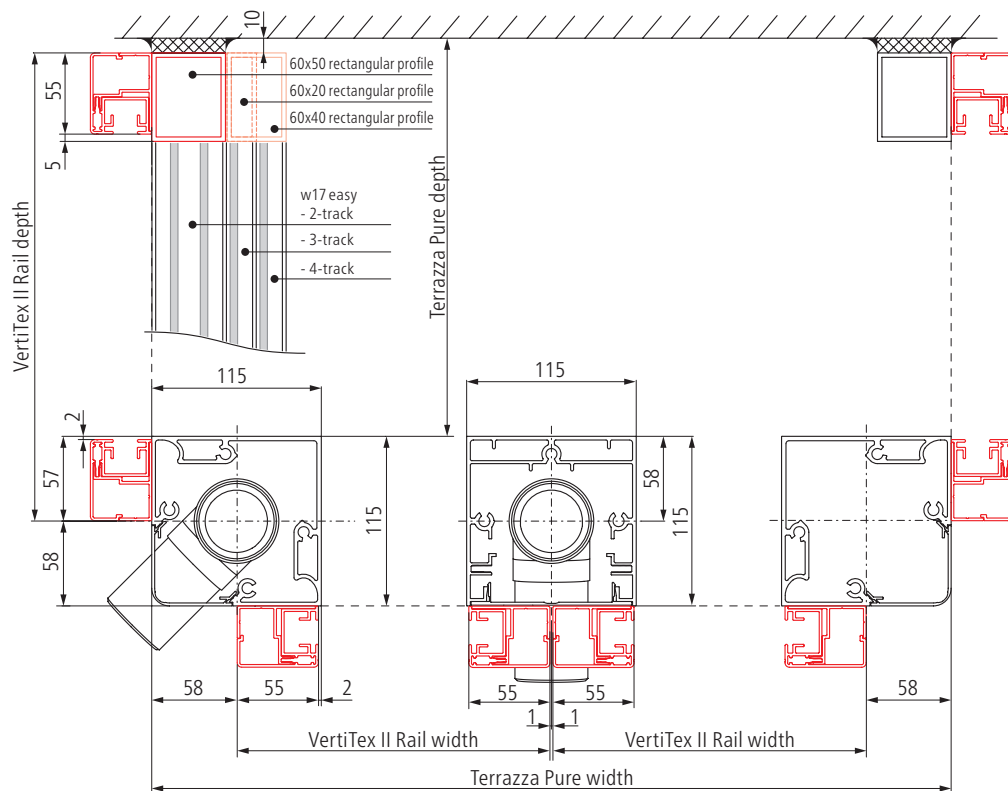


Note: the guide rails end over the drain pipe as standard (note the PA dimensions)

Vertical sun protection


VertiTex II 112 Rope

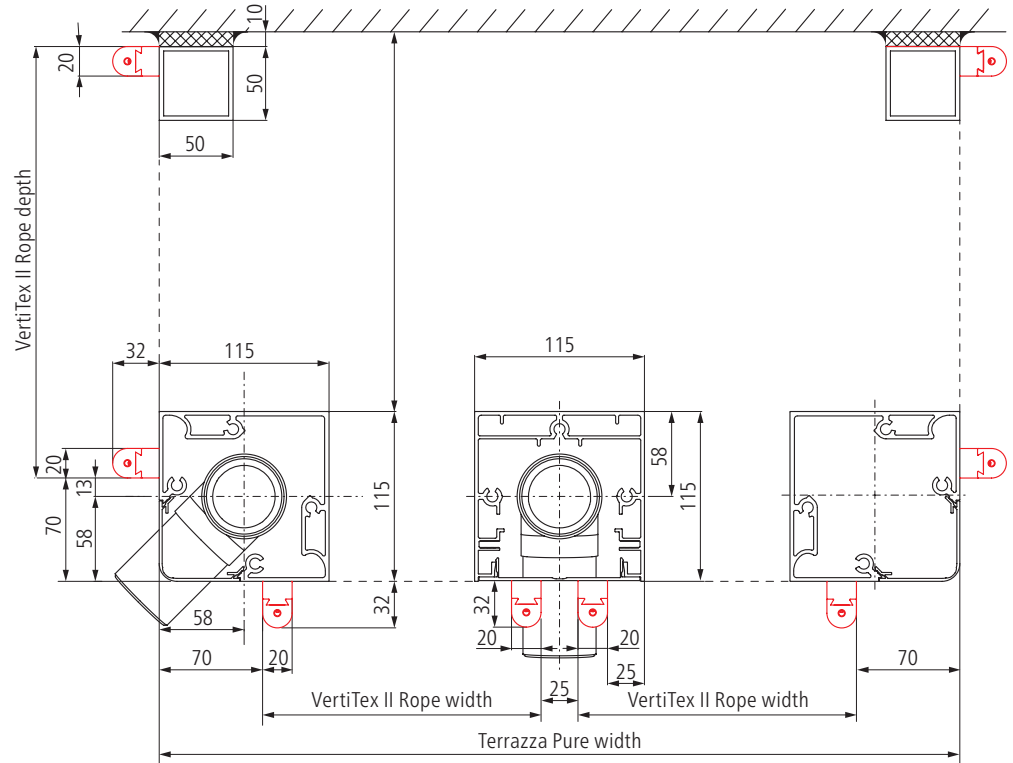

VertiTex II Rope multi-section unit in front

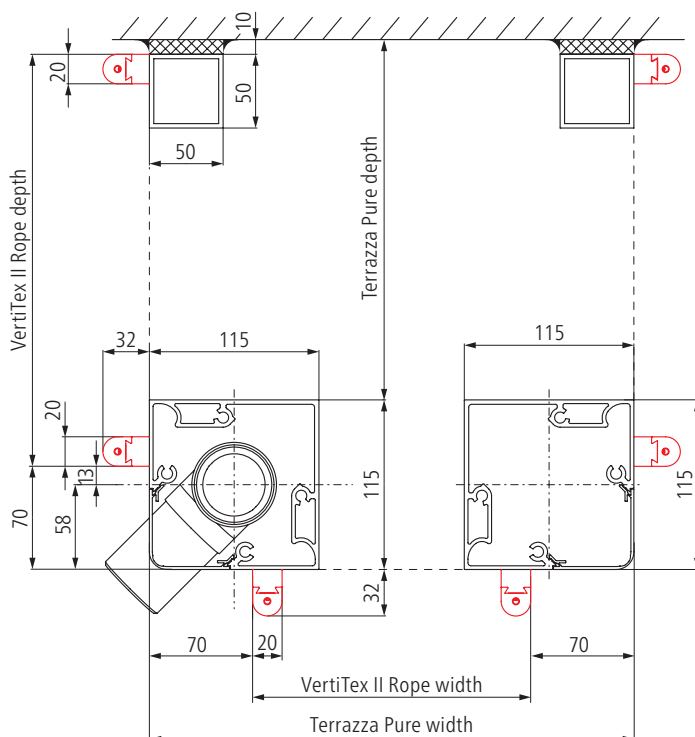

VertiTex II Rope all round

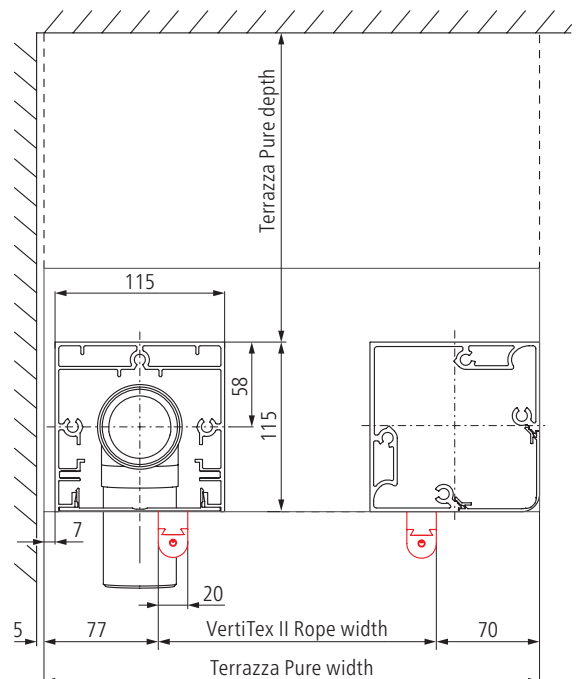


VertiTex II Rope in front with lateral wall

Note: the rope guides end over the drain pipe as standard (note the PA dimensions)


VertiPlus vertical sun protection



The Terrazza Pure combined with VertiTex Zip 112 becomes one perfect unit with the beautiful faceplate – that's the weinor PergoTex II VertiPlus. The system is extremely flexible at the same time, regardless of whether you want the VertiTex II on the right, left or all the way round. There are 8 different combination options in total.

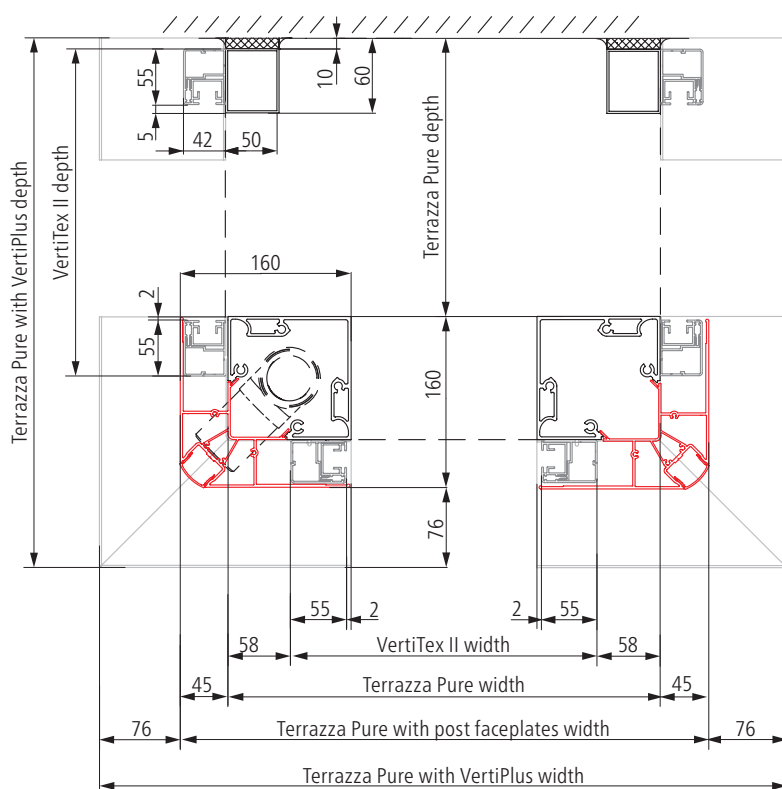

Top view of VertiTex II rail guide on the example at Terrazza Pure front and on the side

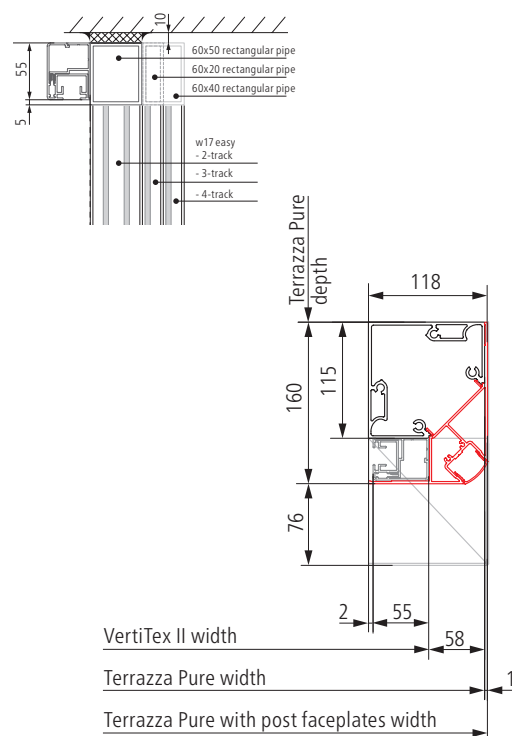


Top view of the VertiTex II rail guide on the example at Terrazza Pure front only

VertiPlus vertical sun protection

Terrazza Pure VertiPlus versions


All round

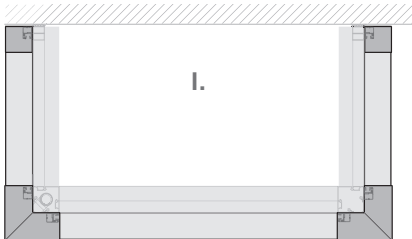


Front and left




Front and right

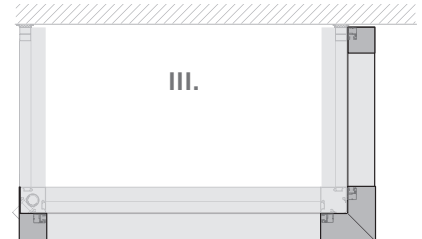


Left and right

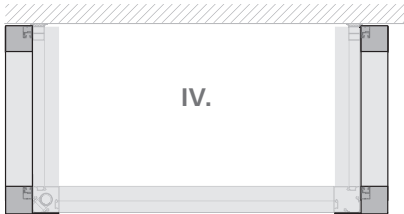


Front

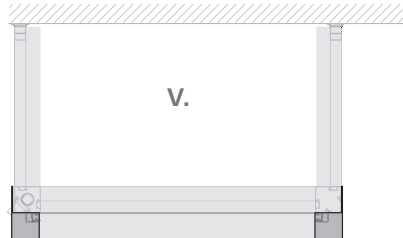

2 VertiTex Zip 112 in a row

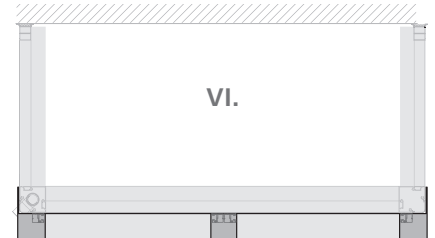


Left

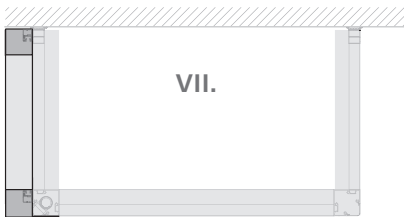

Right



Position of the VertiTex II on the guttering and on the posts of the Terrazza Pure

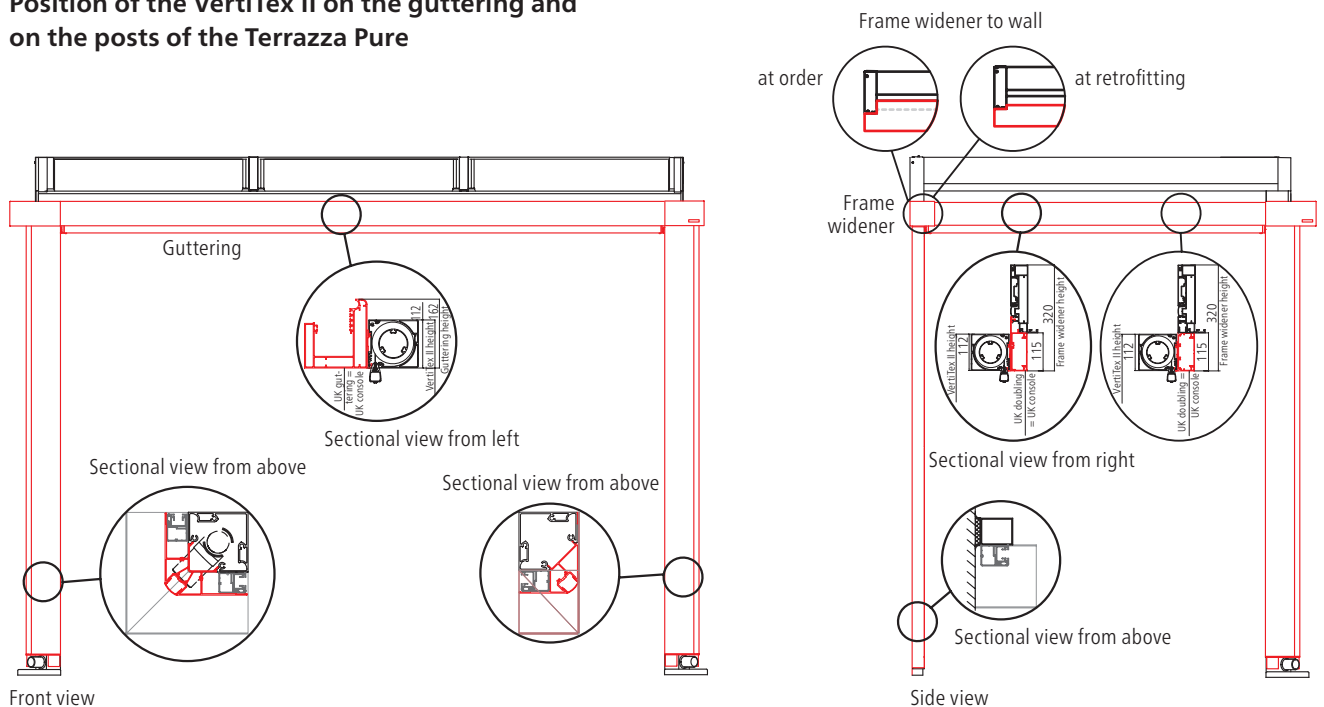

Front view

Side view

Terrazza Pure Sun protection

Underlay sun protection


Sottezza II – undermounted glare protection



Sottezza II is the ideal undermounted sun protection for the weinor Terrazza Pure patio roof and for the Glasoase®, if there is enough air circulation. On sunny days, it offers pleasant dazzle and sun protection.


Sottezza II with up to 70 mm glazing elements on a free-standing Terrazza Pure

1-panel unit

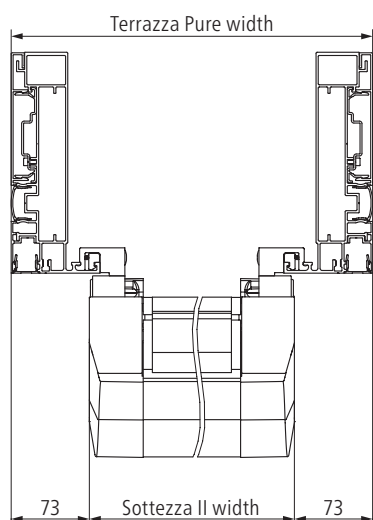


46 mm mounting plate for max. 70 mm wide GE

2-panel unit or two 1-panel units

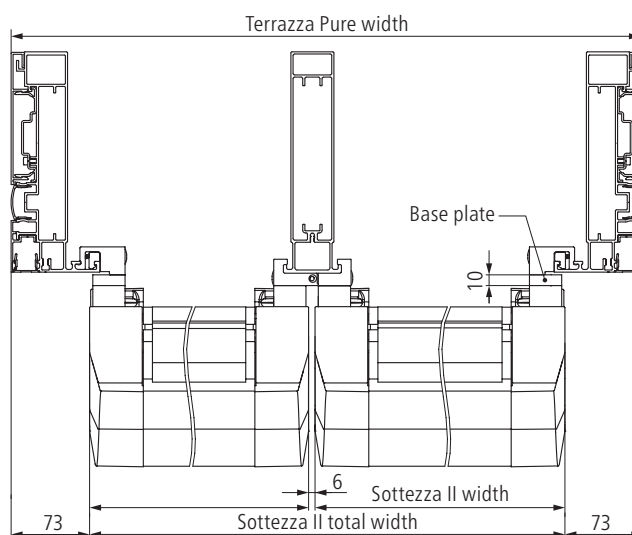


Sottezza II with up to 90 mm glazing elements on a free-standing Terrazza Pure

1-panel unit

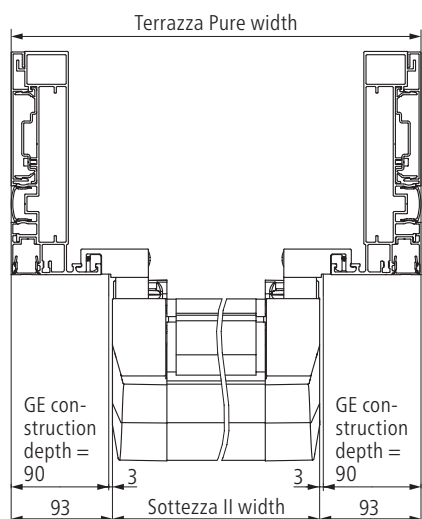

66 mounting plate for max. 90 mm wide GE

2-panel unit or two 1-panel units

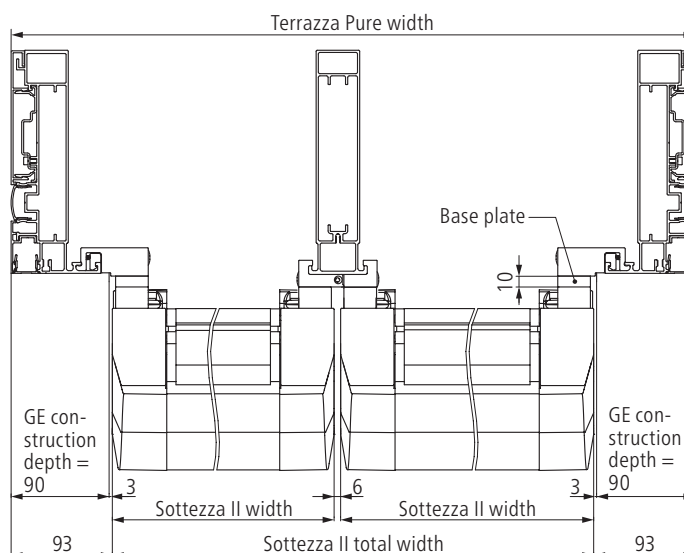

Undermounted sun protection


Side view of Terrazza Pure with Sottezza II



* (with multi-section units 33.5)

The sun protection runs below the roof support. Sottezza II can be mounted very tight under the roof supports thanks to the colour LED strips integrated in the roof supports.

Sottezza II installation under Terrazza Pure

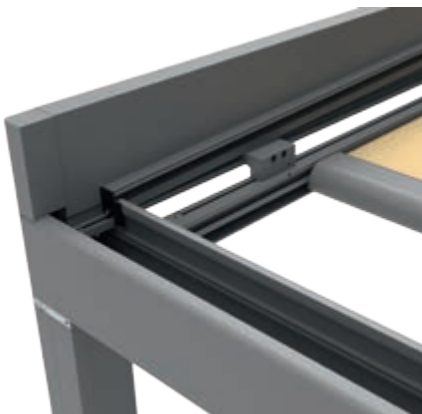

Undermounted installation on a Terrazza Pure patio roof

The Sottezza II mounting bracket allows for fast and secure installation. The brackets grip flush to the underneath of the roof supports, plus no drilling or screwing into the roof supports is required anymore. Also ideal for retrofitting a Sottezza II.

Mounting of the Sottezza II in combination with Terrazza Pure with 0° pitch possible.

Sottezza II mounting plate indented 70 mm



46 mounting plate



46 mounting plate with base plate

Sottezza II mounting plate indented 90 mm



66 mounting plate



66 mounting plate with base plate

Sottezza II mounting plate for multi-section units, in centre



Mounting plate for multi-section units

Terrazza Pure Sun protection




Surrounding shadowing

WGM Top – over roof heat protection




Over roof conservatory awnings from weinor protect the Terrazza patio roof or the Glasoase® from excessive heat build-up.

WGM Top on Terrazza Pure

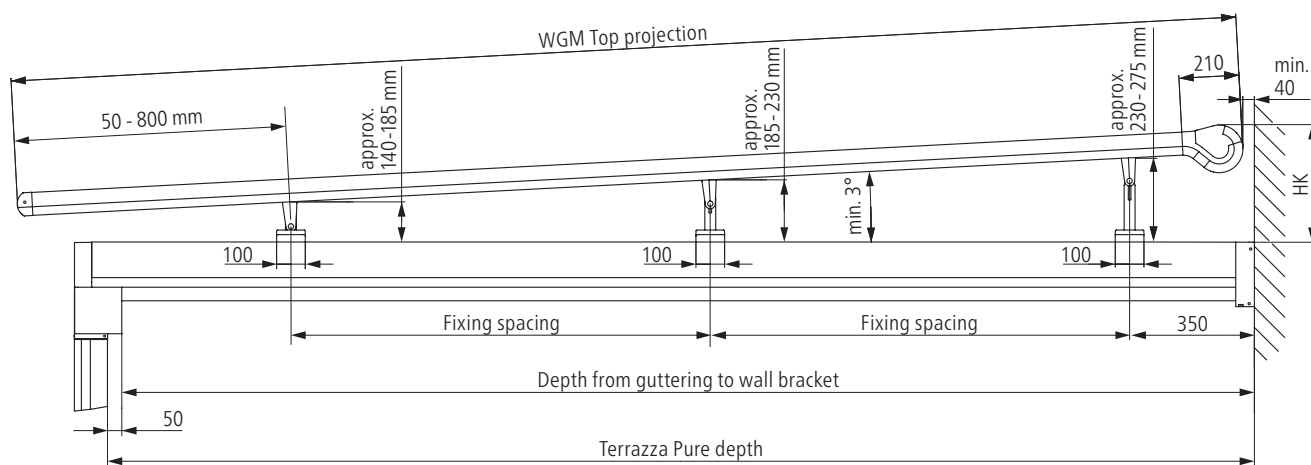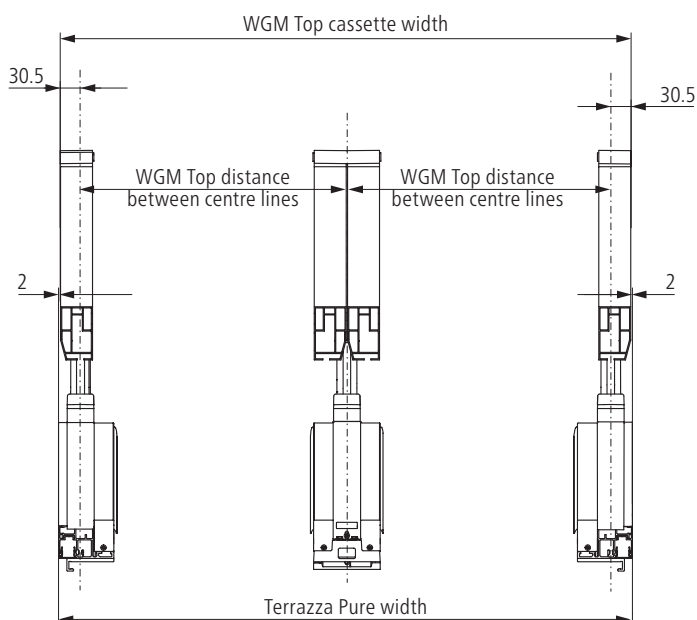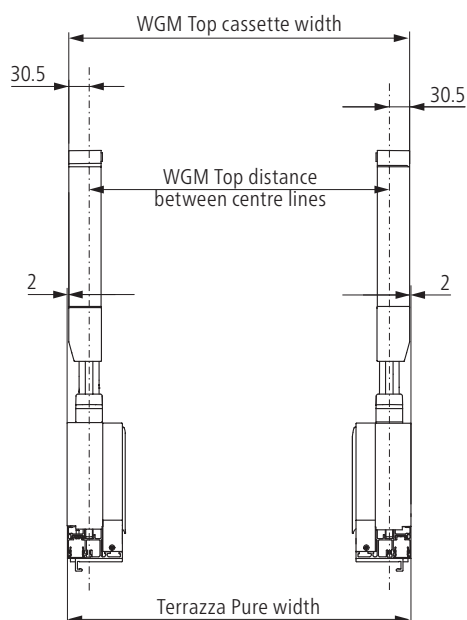


Surrounding shadowing

WGM Top guide rails overhang

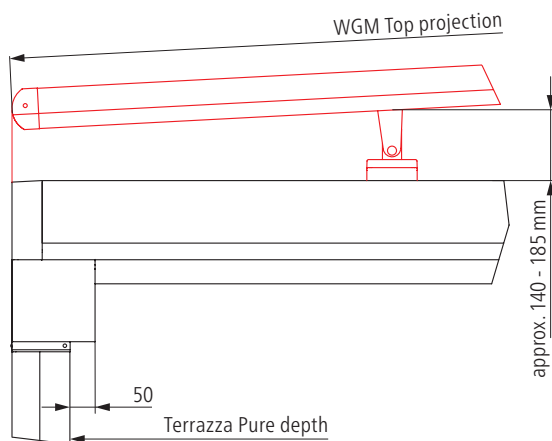

Standard without overhang

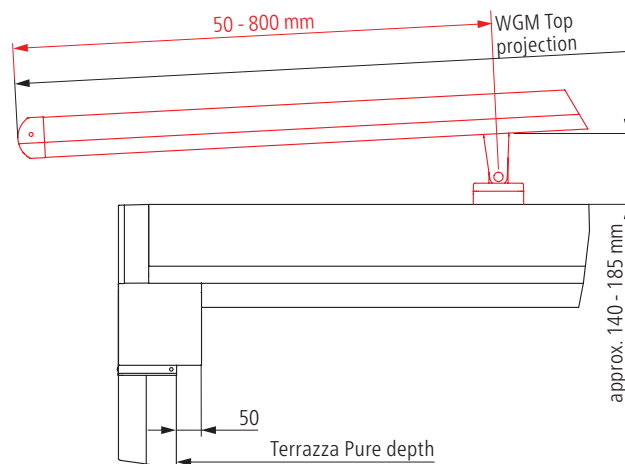

WGM Top with overhang

Determining the projection of the conservatory awning

Terrazza Pure roof depth (mm)	1600	2000	2500	3000	3500	4000
WGM Top 3° pitch guide rails flush with guttering (standard)	1680	2080	2580	3080	3580	4080

Note: WGM Top must be installed with a min. 3° pitch for technical reasons.

Minimum height of WGM Top over Terrazza Pure

Terrazza Pure roof depth (mm)	1600	2000	2500	3000	3500	4000
Box height (HK)	300	330	350	370	390	400

WGM Top installation on Terrazza Pure



Installation on a Terrazza patio roof

WGM Top mounting plate

A support bracket preparation is optionally available for conservatory awnings – perfectly matched, as from one system.




WGM Top mounting plate

Terrazza Pure Glasoase®




w50-c fixed glazing and SUPER LITE for Terrazza Pure


Terrazza Pure with
w50-c SUPER LITE

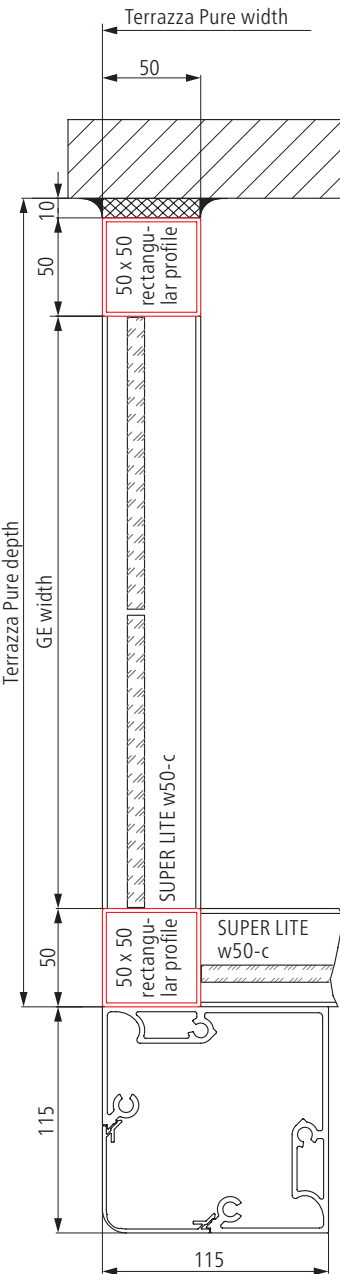

Side roof support with
SUPER LITE with 35 mm frame

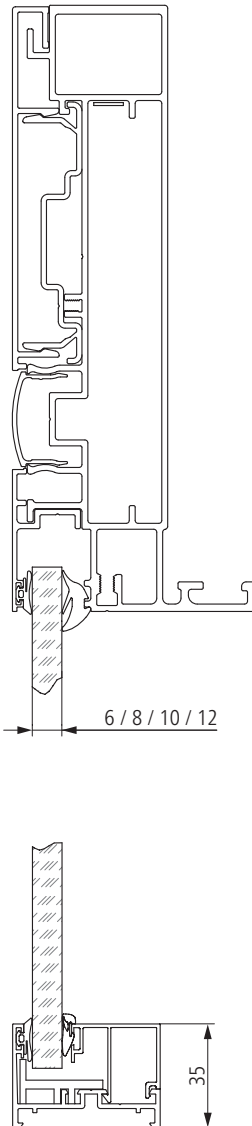


Side roof support with
SUPER LITE with 105 mm frame

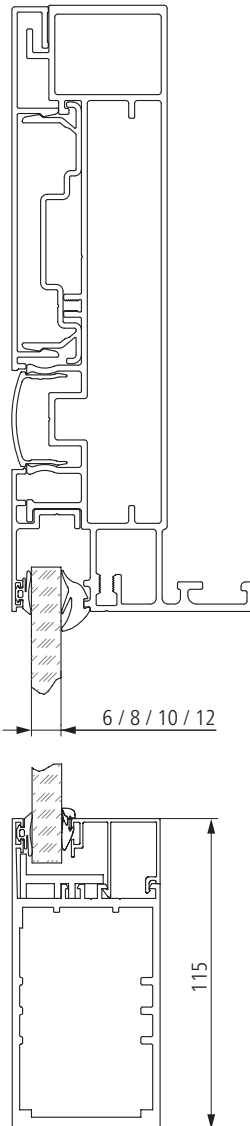


w50-c SUPER LITE fixed glazing

Side roof support with 163 x 50 mm frame
widener (standard) and
w50-c SUPER LITE 35 fixed glazing

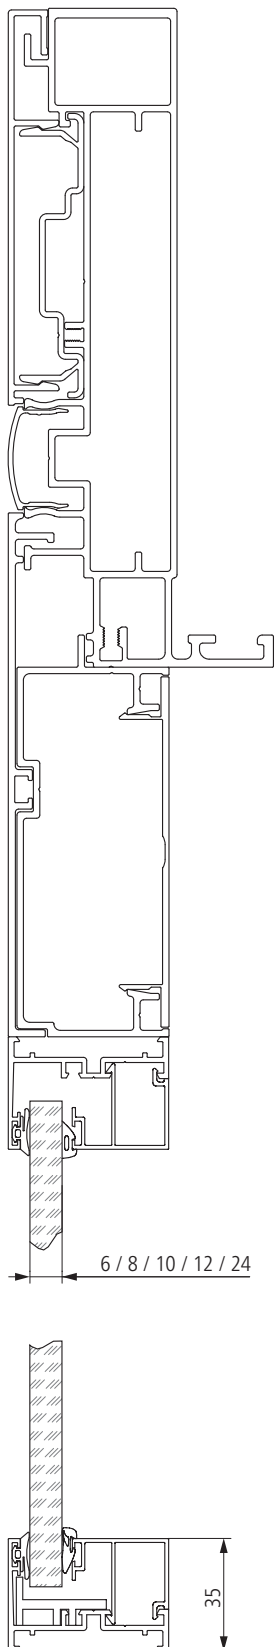


Side roof support with 163 x 50 mm frame
widener (standard) and
w50-c SUPER LITE 105 fixed glazing

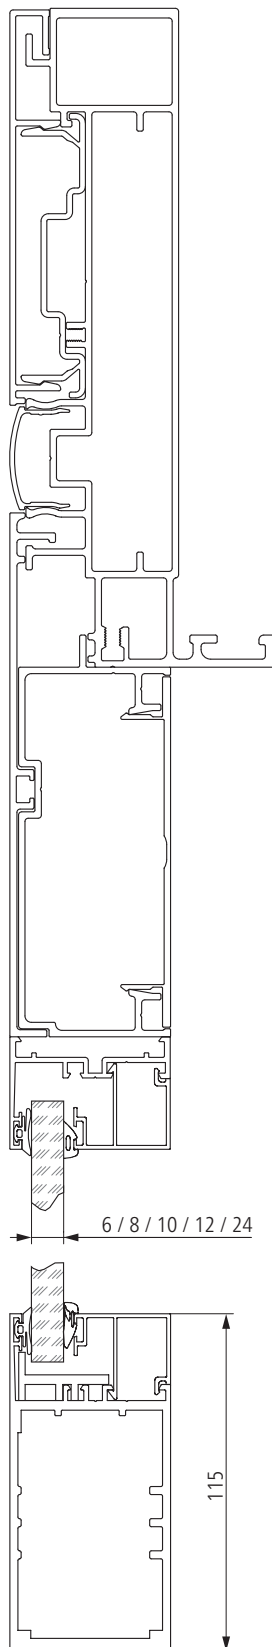


w50-c SUPER LITE fixed glazing

Side roof support with 115 x 50 mm frame widener (for retrofitting) and w50-c SUPER LITE 35 fixed glazing

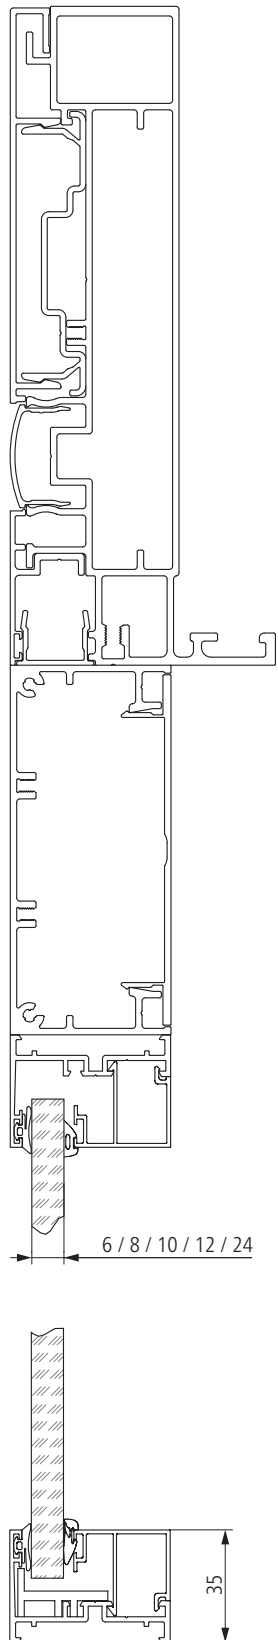


Side roof support with 115 x 50 mm frame widener (for retrofitting) and w50-c SUPER LITE 105 fixed glazing

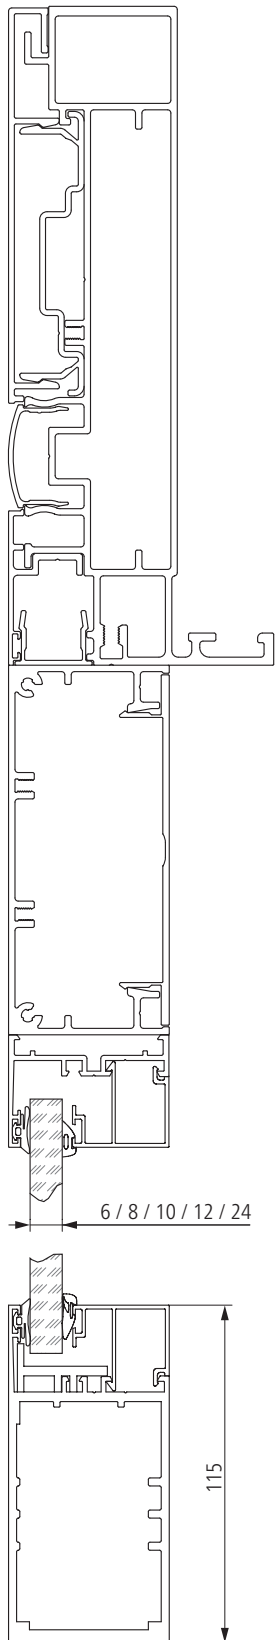


w17 easy

2 to 4-track on one side

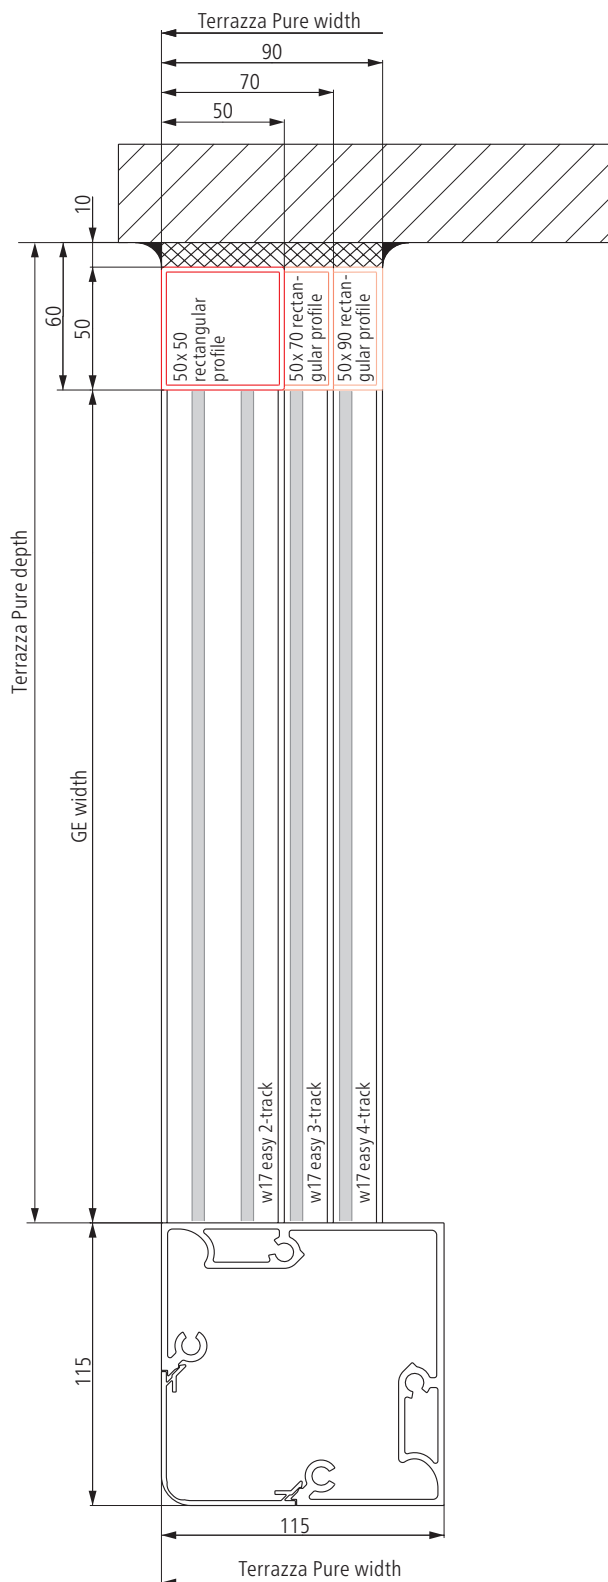


2 to 4-track on one side,
2-track at the front

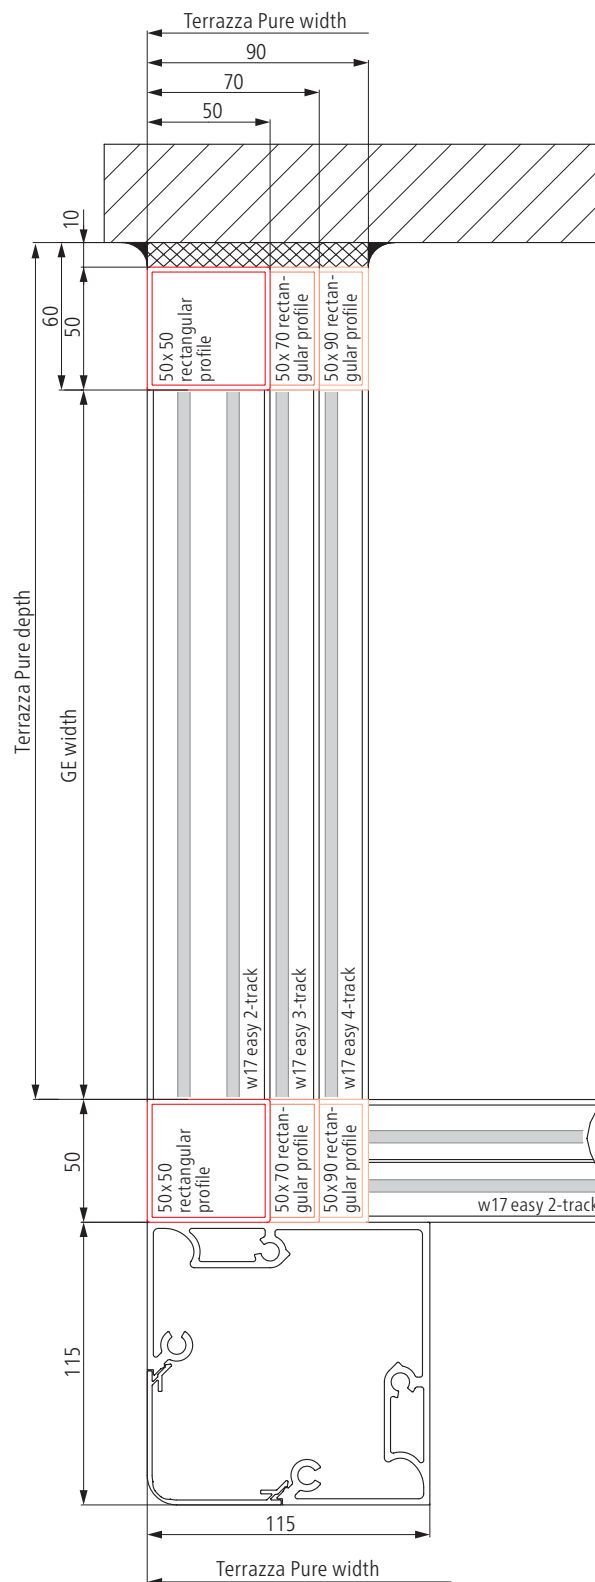


w17 easy

2 to 4-track on one side,
3-track at the front

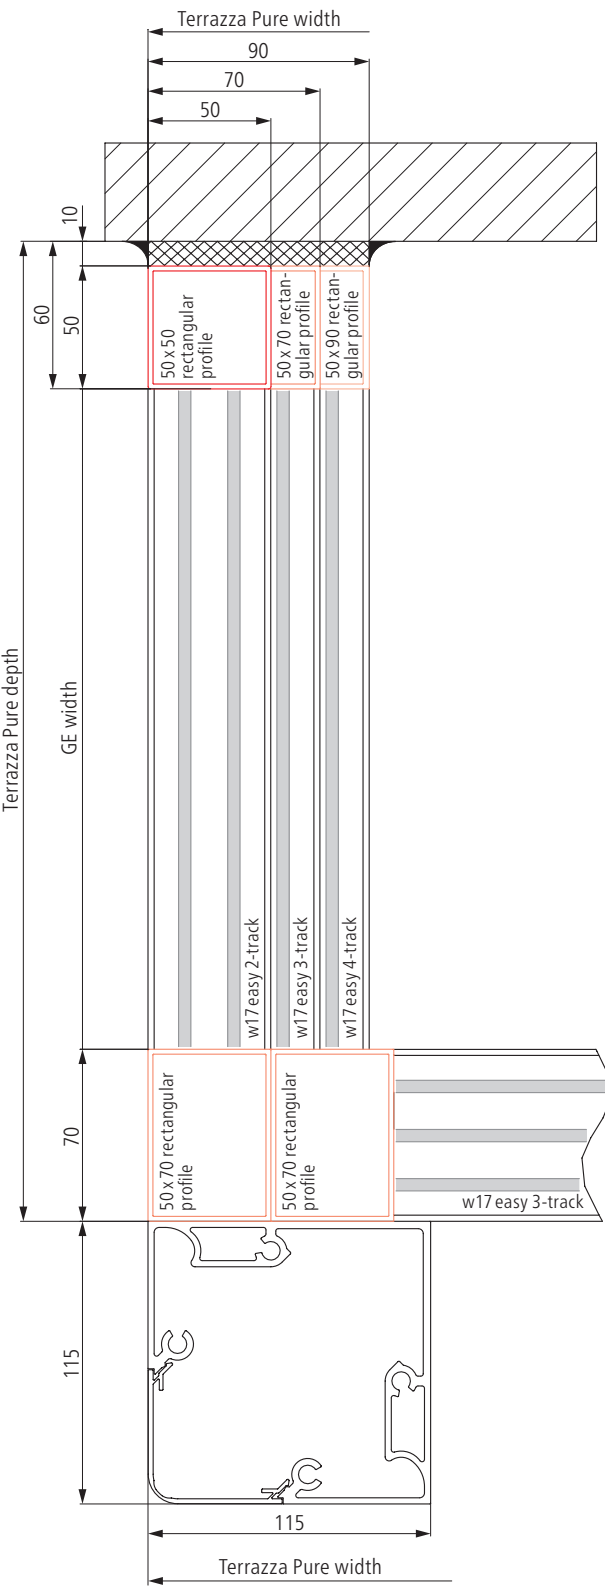


2 to 4-track on one side,
4-track at the front

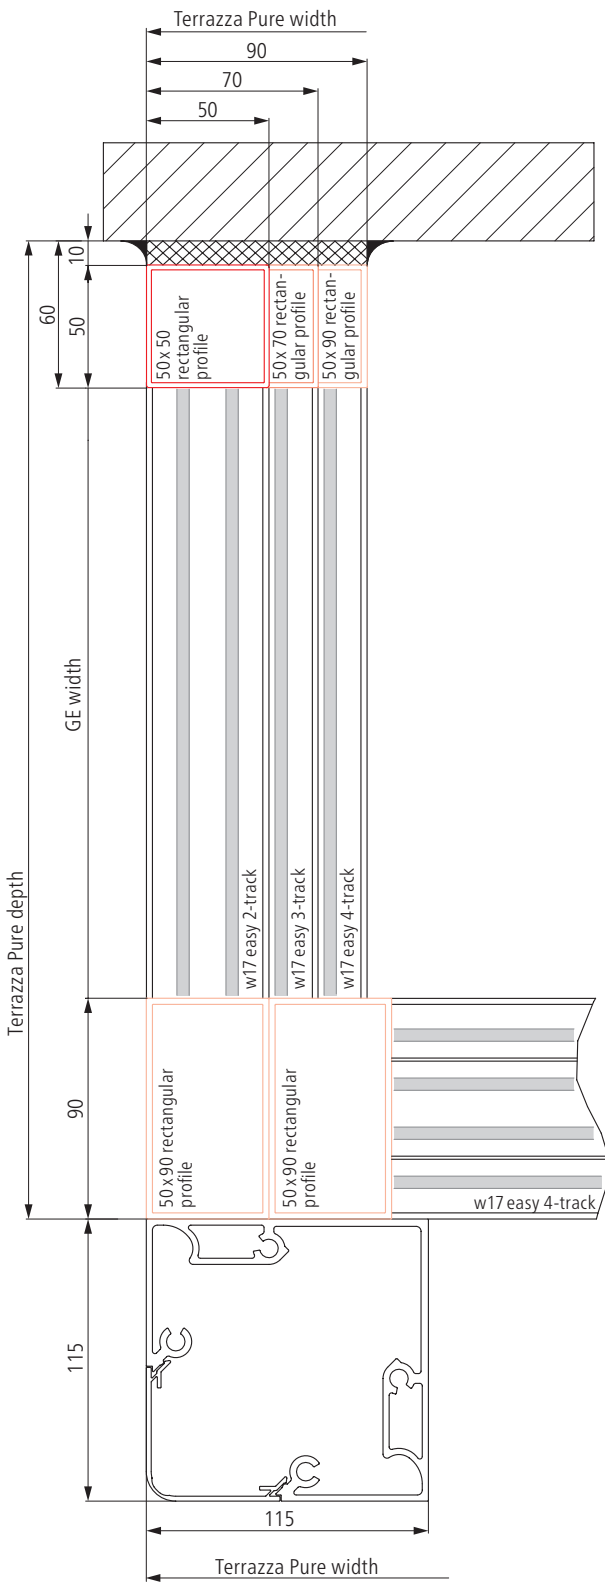


w17 easy

2 to 4-track on one side,
5-track at the front

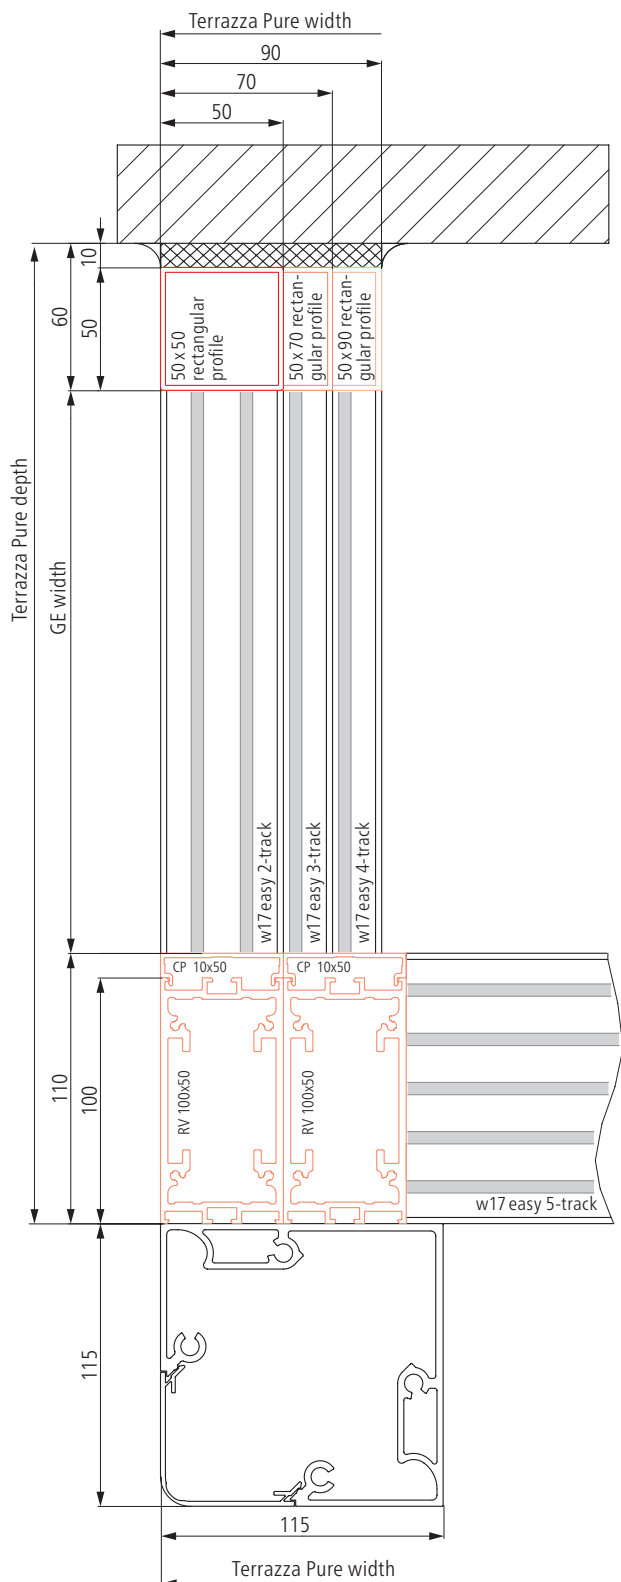


2 to 4-track on one side,
2-5 at the front between posts

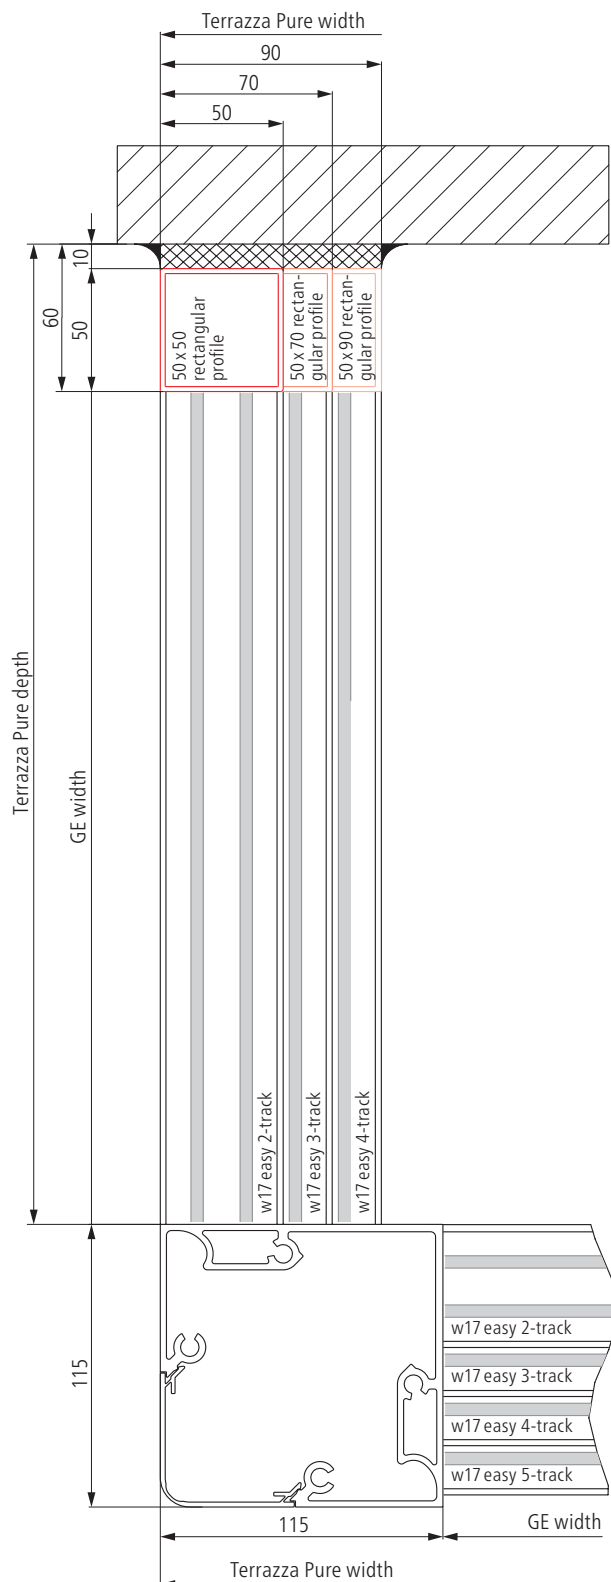


w17 easy

2 to 5-track at the front

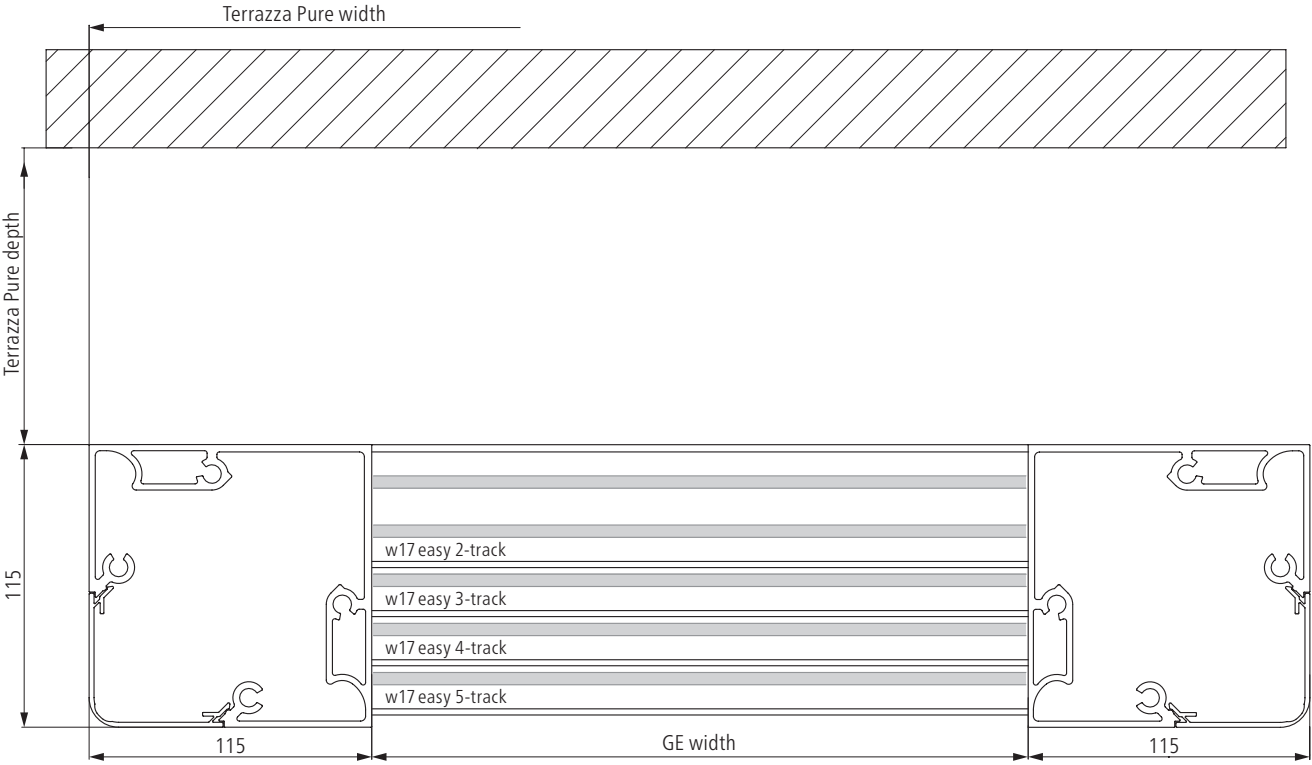


w17 easy

2 to 4-track on one side, 163 x 50 mm
frame widener under roof support (standard)

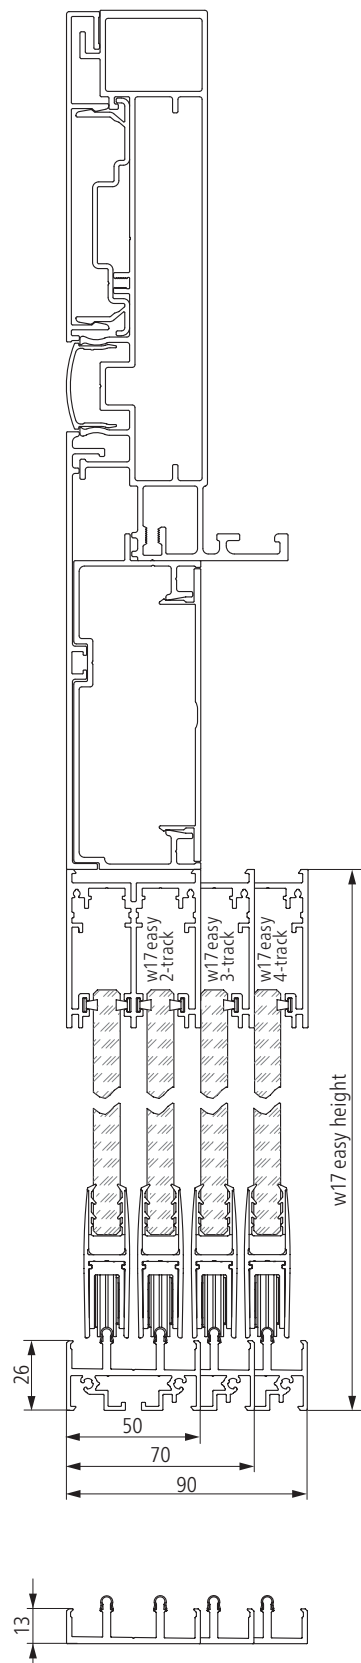


2 to 4-track on one side, 115 x 50 mm
frame widener under roof support (retrofitting)

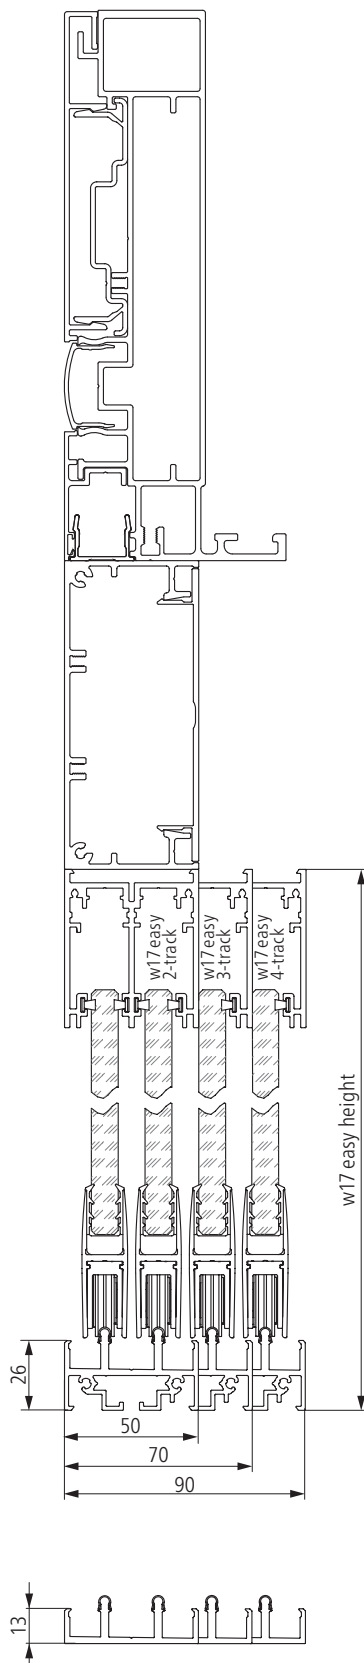


w17 easy

At the front between posts,
2 to 5-track

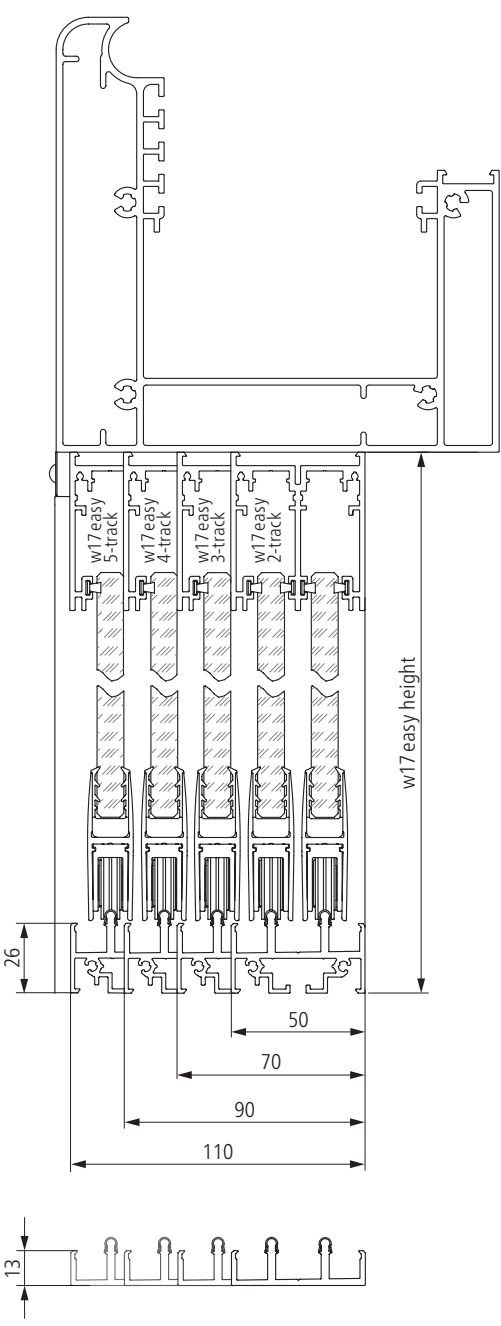


At the front behind posts,
2 to 5-track

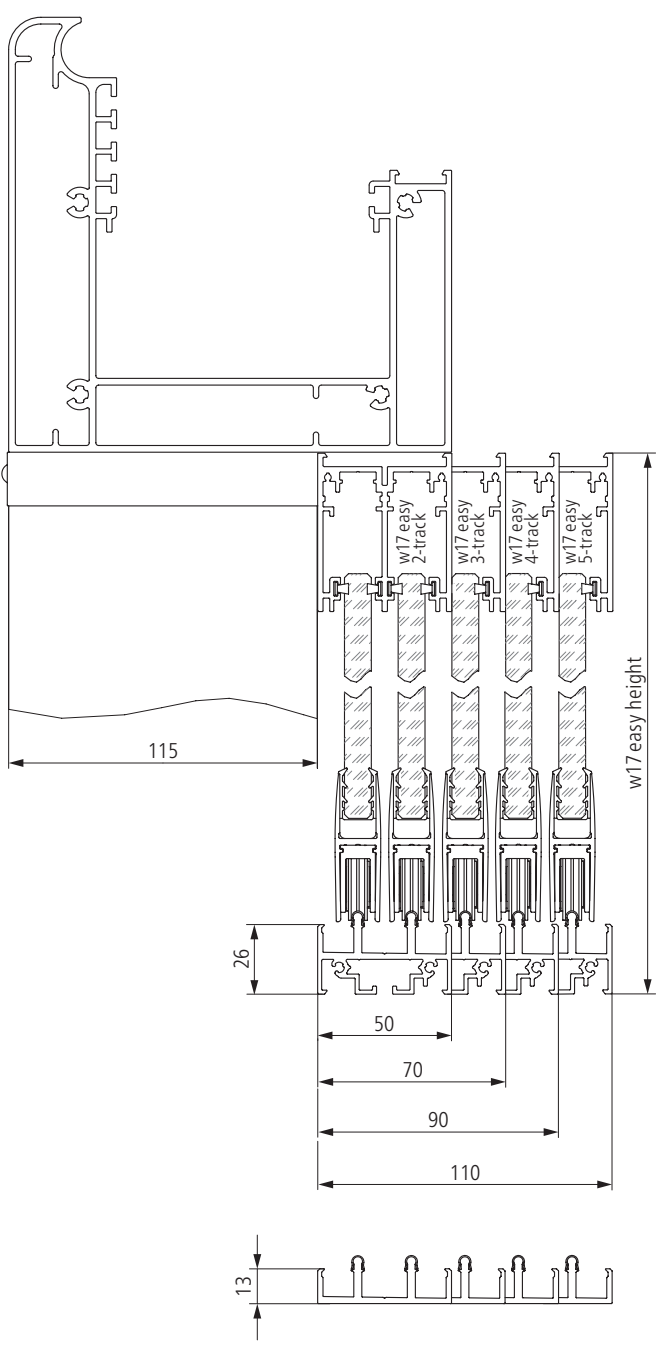






Premium quality
made in Germany



Awning



Awning
with Valance Plus
and Tempura



Awning
with Valance Plus
and Paravento



Pergola awning
Plaza Viva
and Paravento



Pergola awning
weinor PergoTex II
and Tempura



Pergola awning
weinor PergoTex II
with VertiTex II



Terrazza
patio roof
with Sottezza II
sun protection



Terrazza Pure patio roof
with lateral SUPER LITE
fixed glazing



Glasoase® with
conservatory awning
WGM Top and full glass
sliding door w17 easy

AWNINGS

PERGOLA AWNINGS

CUSTOMISED, SYSTEMISED SOLUTIONS

PATIO ROOFS AND GLASOASE®

